




D - subminiature connectors

8630 Series HE 508

Connector accommodating removable machined crimp contacts for 20/24 AWG wires

For heavy duty applications
 Class -55°C to +155°C
 Special proof versions available
 Contacts #20
 Standard shell plating: Cadmium
 Other platings available : Tin
 Zinc

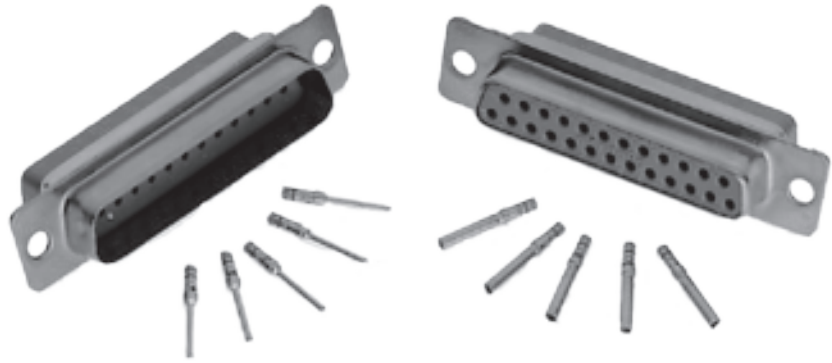

Ordering information

Series 8630	863 0 25 P 012 L N - - -
Options 1	0 - Standard mounting holes (Ø=3.10) 1 - Float mounting
Number of contacts	09, 15, 25, 37, 50
Contact type	P - Pin S - Socket
Specification	None - Standard 012 - Splash proof (see page 13 for details) 015 - Dust-proof (see page 13 for details)
Contacts	None - With standard 20/24 AWG contacts L - Without contact
HE 508 coding	N - Mandatory for standard version (not for 012 Splash proof version and for 015 Dust proof version)
Rear type	None - Standard H - Shielding termination fingers (only for T plating)
Shell plating	None - Cadmium T - Tin Z - Zinc
Front type	None - Standard X - With indents (only for front of male connector)



D - subminiature connectors

8630 Series HE 508

Cross reference list for qualified part number HE508 & SOURIAU

Example:
HE508 N 25 BP = 8630 25 PN

Connector type			HE508	SOURIAU P/N
Removal crimp contact AWG 20/24	Standard	Pin	HE508 N ** BP	8630 ** PN
		Socket	HE508 N ** BS	8630 ** SN
	Float mounting	Pin	HE508 F ** BP	8631 ** PN
		Socket	HE508 F ** BS	8631 ** SN

** : Shell size

Special proof versions (available in HE508 series only)

Examples:
 8630 25 P012
 012: Splash proof version, grommet + interfacial seal + potting (conform to IP65)
 8630 25 P015
 015: Dust proof version, rear grommet only

