

# Wall mounted ■ with screw terminals

to DIN VDE 0623, EN 60309-2. Other voltages and frequencies available on request.

Service

Sockets

Plugs and connectors


Combination units

Special plugs and sockets, accessories

Image	Title / description	Ampere	Poles	110V	230V	400V	500V	>50 - 500V	>50 - 500V				
				50 a. 60 Hz	50 a. 60 Hz	50 a. 60 Hz	50 a. 60 Hz	100 - 300 Hz	>300 - 500 Hz				
				3p 4p 5p	3p 4p 5p	3p 4p 5p	3p 4p 5p	3p 4p 5p	3p 4p 5p				
				4h 4h 4h	6h 9h 9h	9h 6h 6h	7h 7h 7h	10h 10h 10h	2h 2h 2h				
				Part numbers									
	<b>Wall mounted socket</b> top entry	16	3	1177	1178								
				16	4		1267	1268	1269				
					5			1					
				32	3	1368	1369	1370					
					4		1372	1373	1374				
					5			2					
▲ IP 44 Std. Pack. Qty: 10 Dimensions: page 10													
	<b>Wall mounted socket</b> top and bottom entry	16	3	100*	101*	102*		2169*	2241*				
				16	4	103*	104*	105*	106*	107*	108*		
					5	109*	110*	111*	2000*	2188*	2199*		
				32	3	1420	1421	1422		3139	3134		
					4	1423	1424	1425	1426	1427	1428		
					5	1555	1556	1557	3152	3154	3149		
▲ IP 44 Std. Pack. Qty: 10 Dimensions: page 10				* Dimensions: page 10 / Drawing 1 MB 209 32A: Optionally fitted with auxiliary contact (see page 34).									
	<b>Wall mounted socket</b> SoftCONTACT, top and bottom entry	63	3	1136A	1137A								
				63	4		1140A	1141A	1142A				
					5		1144A	1145A					
				▲ IP 44 Std. Pack. Qty: 5 Dimensions: page 10				Products with pilot contact: Part no. + index P.					
					<b>Wall mounted socket</b> top and bottom entry	16	3	1193	1192	1211			
								16	4	1194	1195	1196	1197
5	1198	1199	1200										
32	3	1201	1202					1203					
	4	1204	1205					1206	1207	1214	1215		
	5	1208	1209					1210					
♦♦ IP 67 Std. Pack. Qty: 10 Dimensions: page 10				Optionally fitted with auxiliary contact (see page 34).									
	<b>Wall mounted socket</b> SoftCONTACT, top and bottom entry	63	3	856	128A	129A							
				63	4	130A	131A	132A	133A				
					5	134A	135A	136A	2007A				
				♦♦ IP 67 Std. Pack. Qty: 5 Dimensions: page 10				Products with pilot contact: Part no. + index P.					
					<b>Wall mounted socket</b> top and bottom entry	125	3	on request					
								125	4	137	138	139	140
5	141	142	143						2139				
♦♦ IP 67 Std. Pack. Qty: 3 Dimensions: page 10								Products with pilot contact: Part no. + index P.					

# Wall mounted ■ screwless, with TwinCONTACT

to DIN VDE 0623, EN 60309-2. Other voltages and frequencies available on request.

Image	Title / description	Ampere	Poles	110V	230V	400V	500V	>50 - 500V	>50 - 500V	
				50 a. 60 Hz	50 a. 60 Hz	50 a. 60 Hz	50 a. 60 Hz	100 - 300 Hz	>300 - 500 Hz	
				3p 4p 5p	3p 4p 5p	3p 4p 5p	3p 4p 5p	3p 4p 5p	3p 4p 5p	
				4h 4h 4h	6h 9h 9h	9h 6h 6h	7h 7h 7h	10h 10h 10h	2h 2h 2h	
				Part numbers						
	<b>Wall mounted socket</b> screwless, with TwinCONTACT, top entry  ⚠ IP 44 Std. Pack. Qty: 10 Dimensions: page 10	16	3	1340	1341					
			4		1342	1343	1344			
			5			31				
			32	1345	1346					
			32	4	1347	1348	1349			
			32	5		32				
	<b>Wall mounted socket</b> screwless, with TwinCONTACT, top and bottom entry  ⚠ IP 44 Std. Pack. Qty: 10 Dimensions: page 10	16	3	1719	1720	1721				
			4		1723	1724	1725	1726	1727	
			5		1730	3331				
	<b>Wall mounted socket</b> screwless, with TwinCONTACT, top and bottom entry  ⚠ IP 44 Std. Pack. Qty: 10 Dimensions: page 10	16	4	1750	1751	418	1752	1753	1754	
			5	1755	1756	419	1757			
			32	3	1851	420	1852			
			32	4	1855	1856	421	1857	1858	1859
			32	5	1860	1861	422	1862		1864
				Optionally fitted with auxiliary contact (see page 34).						
	<b>Wall mounted socket</b> screwless, with TwinCONTACT, top and bottom entry  ⚠ IP 67 Std. Pack. Qty: 10 Dimensions: page 10	16	3	1867	241	1868				
			4	1870	1871	242	1872	1873	1874	
			5	1875	1876	200				
			32	3	1877	243	1878			
			32	4	1879	1880	244	1881	1882	1883
			32	5	1884	1885	245			
				Optionally fitted with auxiliary contact (see page 34).						
	<b>Double box</b> screwless, with TwinCONTACT, CEE and socket SCHUKO® in one enclosure  ⚠ IP 44 Std. Pack. Qty: 5 Dimensions: page 10	16	4		1647	1648				
			5			1649				
				Also available with French/Belgian, Danish and Swiss standards.						
	<b>Double box</b> screwless, with TwinCONTACT, CEE and socket SCHUKO® in one enclosure, with fuse holder, max. 10 A H  ⚠ IP 44 Std. Pack. Qty: 5 Dimensions: page 10	16	5			1650				
			32	5			1651			
				Also available with French/Belgian, Danish and Swiss standards.						

Service

Sockets

Plugs and connectors

Combination units

Special plugs and sockets,  
accessories

# Wall mounted, switched and interlocked ■ IP 44

to DIN VDE 0623, EN 60309-2. Other voltages and frequencies available on request.





Service


Sockets

Plugs and connectors

Combination units

Special plugs and sockets, accessories

Image	Title / description	Ampere	Poles	110V	230V	400V	500V	>50 - 500V	>50 - 500V
				50 a. 60 Hz	50 a. 60 Hz	50 a. 60 Hz	50 a. 60 Hz	100 - 300 Hz	>300 - 500 Hz
				3p 4p 5p	3p 4p 5p	3p 4p 5p	3p 4p 5p	3p 4p 5p	3p 4p 5p
				4h 4h 4h	6h 9h 9h	9h 6h 6h	7h 7h 7h	10h 10h 10h	2h 2h 2h
				Part numbers					
	<b>Wall mounted socket</b> switched, with mechanical DUO-interlock  ⚠ IP 44 Std. Pack. Qty: 1 Dimensions: page 10	16	3	7010A	7002A				
		16	4	5457A	5099A	5100A	5101A		
		16	5	5459A	5102A	5103A			
		32	3	5743A	5696A				
		32	4	5460A	5104A	5105A	5106A		
		32	5	5462A	5107A	5108A			
	<b>Wall mounted socket</b> SoftCONTACT, switched, with mechanical DUO-interlock  ⚠ IP 44 Std. Pack. Qty: 1 Dimensions: page 10	63	3	6569	6571				
		63	4		5955A	5956A	5957A		
		63	5			5959A			
	<b>Wall mounted socket</b> switched, with mechanical DUO-interlock  ⚠ IP 44 Std. Pack. Qty: 1 Dimensions: page 10	16	3	7602	7603				
		16	4		7604	7605	7606		
		16	5			7607			
		32	3	7611	7612				
		32	4		7613	7614	7615		
		32	5			7616			
	<b>Wall mounted socket</b> switched, with mechanical DUO-interlock  ⚠ IP 44 Std. Pack. Qty: 1	16	3	7273	7274				
		16	4		7380	7275			
		16	5			7276			

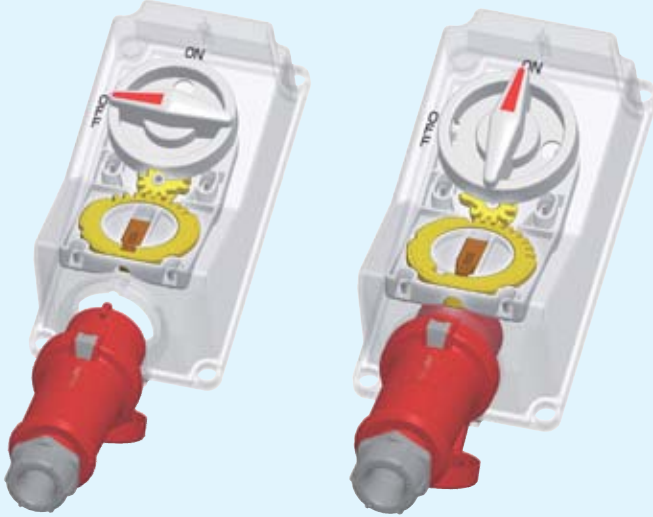






**DUO mechanical**

After insertion and switching on, the plug is locked in the ON position.

After switching OFF and withdrawing the plug, the switch is locked.

# Wall mounted, switched and interlocked ■ IP 67

to DIN VDE 0623, EN 60309-2. Other voltages and frequencies available on request.

Image	Title / description	Ampere	Poles	110V	230V	400V	500V	>50 - 500V	>50 - 500V	
				50 a. 60 Hz	50 a. 60 Hz	50 a. 60 Hz	50 a. 60 Hz	100 - 300 Hz	>300 - 500 Hz	
 <p><b>Wall mounted socket</b> switched, with mechanical DUO-interlock</p> <p>⚡⚡ IP 67 Std. Pack. Qty: 1 Dimensions: page 11</p>		16	3	7011A	7012A					
			4		5599A	5600A	5601A			
			5		5602A	5603A				
			32	3	5924A	5793A				
				4		5604A	5605A	5606A		
				5		5607A	5608A			
 <p><b>Wall mounted socket</b> SoftCONTACT, switched, with mechanical DUO-interlock</p> <p>⚡⚡ IP 67 Std. Pack. Qty: 1 Dimensions: page 11</p>		63	3	5925A	5911A					
			4		5109A	5110A	5111A			
			5		5112A	5113A	5759A			
 <p><b>Wall mounted socket</b> TorsionSpringCONTACT, switched, with mechanical DUO-interlock</p> <p>⚡⚡ IP 67 Std. Pack. Qty: 1 Dimensions: page 11</p>		125	3	7060	7000					
			4		5887A	5691A	5690A			
			5		5888A	5692A				
 <p><b>Wall mounted socket</b> switched, with mechanical DUO-interlock</p> <p>⚡⚡ IP 67 Std. Pack. Qty: 1 Dimensions: page 11</p>		16	3	7620	7621					
			4		7623	7624	7625			
			5			7626				
			32	3	7628	7629				
				4		7633	7634	7635		
				5			7636			
 <p><b>Wall mounted socket</b> switched, with mechanical DUO-interlock</p> <p>⚡⚡ IP 67 Std. Pack. Qty: 1</p>		16	3	7277	7278					
			4		7381	7279				
			5			7280				

Service

Sockets

Plugs and connectors

Combination units

Special plugs and sockets, accessories

# Wall mounted, fused

to DIN VDE 0623, EN 60309-2. Other voltages and frequencies available on request.

Service

Sockets

Plugs and connectors

Combination units






Special plugs and sockets, accessories

Image	Title / description	Ampere	Poles	110V	230V	400V	500V	>50 - 500V	>50 - 500V	
				50 a. 60 Hz	50 a. 60 Hz	50 a. 60 Hz	50 a. 60 Hz	100 - 300 Hz	>300 - 500 Hz	
				3p 4p 5p	3p 4p 5p	3p 4p 5p	3p 4p 5p	3p 4p 5p	3p 4p 5p	
				4h 4h 4h	6h 9h 9h	9h 6h 6h	7h 7h 7h	10h 10h 10h	2h 2h 2h	
				Part numbers						
	<b>Wall mounted socket</b> protected by 1 RCD 30 mA  ⚠ IP 44 Std. Pack. Qty: 1 Dimensions: page 11	16	3	52111	24193					
		16	4			24194				
		16	5			24195				
		32	3	52120	24196					
		32	4			24197				
		32	5			24198				
	<b>Wall mounted socket</b> protected by 1 "C"-type MCB  ⚠ IP 44 Std. Pack. Qty: 1 Dimensions: page 11	16	3	52170	52171					
		16	4			52172				
		16	5			52173				
		32	3	52174	52175					
		32	4			52176				
		32	5			52177				
	<b>Wall mounted socket</b> protected by 1 RCD 30 mA and 1 "C"-type MCB  ⚠ IP 44 Std. Pack. Qty: 1 Dimensions: page 11	16	3	52131	24233					
		16	4			24234				
		16	5			24235				
		32	3	52140	24236					
		32	4			24237				
		32	5			24238				
	<b>Wall mounted socket</b> protected by 1 RCD 30 mA  ⚠ IP 44 Std. Pack. Qty: 1 Dimensions: page 11	16	3	52063	52064					
		16	4			52076				
		16	5			52077				
		32	3	52078	52079					
		32	4			52080				
		32	5			52081				
	<b>Wall mounted socket</b> protected by 1 RCD 30 mA and 1 "C"-type MCB  ⚠ IP 44 Std. Pack. Qty: 1 Dimensions: page 11	16	3	52093	52094					
		16	4			52096				
		16	5			52097				
		32	3	52098	52099					
		32	4			52100				
		32	5			52101				
	<b>Wall mounted socket</b> protected by 1 RCD 30 mA  ⚠ IP 67 Std. Pack. Qty: 1 Dimensions: page 11	16	3		7148MEL					
		16	4			7149MEL				
		16	5			7150MEL				
		32	4			7151MEL				
		32	5			7152MEL				



# Wall mounted, fused

to DIN VDE 0623, EN 60309-2. Other voltages and frequencies available on request.

Image	Title / description	Ampere	Poles	110V	230V	400V	500V	>50 - 500V	>50 - 500V
				50 a. 60 Hz	50 a. 60 Hz	50 a. 60 Hz	50 a. 60 Hz	100 - 300 Hz	>300 - 500 Hz
				3p 4p 5p	3p 4p 5p	3p 4p 5p	3p 4p 5p	3p 4p 5p	3p 4p 5p
				4h 4h 4h	6h 9h 9h	9h 6h 6h	7h 7h 7h	10h 10h 10h	2h 2h 2h
Part numbers									
	<b>Wall mounted socket</b> switched, with mechanical DUO interlock, protected by 1 RCD 30 mA  ⚡ IP 67 Std. Pack. Qty: 1 Dimensions: page 17	16	3	921380	922452				
		16	4			922517			
		16	5			922453			
		32	3	922519	921442				
		32	4			922518			
		32	5			922218			
	<b>Wall mounted socket</b> protected by 1 RCD 30 mA  ⚡ IP 67 Std. Pack. Qty: 1 Dimensions: page 17	16	3	920700	920649				
		16	4			920791			
		16	5			920278			
		32	3		921160				
		32	4			923296			
		32	5			921953			
	<b>Wall mounted socket</b> resistant to chemicals, made of AMELAN®, protected by 1 RCD 30 mA  ⚡ IP 67 Std. Pack. Qty: 1 Dimensions: page 17	16	3	923273	920821				
		16	4			923274			
		16	5			923275			
		32	3		923276				
		32	4			923297			
		32	5			923277			
	<b>Wall mounted socket</b> protected by 1 RCD 30 mA  ⚡ IP 67 Std. Pack. Qty: 1 Dimensions: page 17	63	3		920666				
		63	4			920668			
		63	5			920670			
	<b>Wall mounted socket</b> resistant to chemicals, made of AMELAN®, protected by 1 RCD 30 mA  ⚡ IP 67 Std. Pack. Qty: 1 Dimensions: page 17	63	3		922520				
		63	4			922521			
		63	5			922522			

Service

Sockets

Plugs and connectors

Combination units

Special plugs and sockets,  
accessories

# Wall mounted, switched, interlocked and fused

to DIN VDE 0623, EN 60309-2. Other voltages and frequencies available on request.







Service

Sockets

Plugs and connectors






Combination units

Special plugs and sockets, accessories

Image	Title / description	Ampere	Poles	110V 50 a. 60 Hz			230V 50 a. 60 Hz			400V 50 a. 60 Hz			500V 50 a. 60 Hz			>50 - 500V 100 - 300 Hz			>50 - 500V >300 - 500 Hz		
				3p	4p	5p	3p	4p	5p	3p	4p	5p	3p	4p	5p	3p	4p	5p	3p	4p	5p
	<b>Wall mounted socket</b> switched, with mechanical DUO-interlock, protected by 1 RCD 30 mA  ♦♦ IP 67 Std. Pack. Qty: 1 Dimensions: page 11	16	3	52210		51392															
		16	4						24202												
		16	5						24203												
		32	3	52211		24204															
		32	4							24205											
		32	5							24206											
	<b>Wall mounted socket</b> switched, with mechanical DUO-interlock, protected by 1 RCD 30 mA and 1 "C"-type MCB  ♦♦ IP 67 Std. Pack. Qty: 1 Dimensions: page 11	16	3	52213		51393															
		16	4						24242												
		16	5						24243												
		32	3	52214		24244															
		32	4							24245											
		32	5							24246											
	<b>Wall mounted socket</b> SoftCONTACT, switched, with mechanical DUO-interlock, protected by 1 RCD 30 mA  ♦♦ IP 67 Std. Pack. Qty: 1 Dimensions: page 11	63	3	52212		24207															
		63	4						24208												
		63	5						24209												
	<b>Wall mounted socket</b> SoftCONTACT, switched, with mechanical DUO-interlock, protected by 1 RCD 30 mA and 1 "C"-type MCB  ♦♦ IP 67 Std. Pack. Qty: 1 Dimensions: page 11	63	3	52215		24247															
		63	4						24248												
		63	5						24249												
	<b>Wall mounted socket</b> TorsionSpringCONTACT, switched, with mechanical DUO-interlock, protected by 1 RCD 30 mA  ♦♦ IP 67 Std. Pack. Qty: 1 Dimensions: page 11	125	3			52030															
		125	4						52031												
		125	5						52032												
	<b>Wall mounted socket</b> TorsionSpringCONTACT, switched, with mechanical DUO-interlock, protected by 1 RCD 100 mA  ♦♦ IP 67 Std. Pack. Qty: 1 Dimensions: page 11	125	3			52033															
		125	4						52034												
		125	5						52035												

# Wall mounted, high resistance to chemicals, made of AMELAN®

to DIN VDE 0623, EN 60309-2. Colour: grey (RAL 7000) and colour code. Other voltages and frequencies available on request.

Image	Title / description	Ampere	Poles	110V 50 a. 60 Hz		230V 50 a. 60 Hz		400V 50 a. 60 Hz		500V 50 a. 60 Hz		>50 - 500V 100 - 300 Hz		>50 - 500V >300 - 500 Hz						
				3p 4h	4p 4h	5p 4h	3p 6h	4p 9h	5p 9h	3p 9h	4p 6h	5p 6h	3p 7h	4p 7h	5p 7h	3p 10h	4p 10h	5p 10h	3p 2h	4p 2h
				Part numbers																
	<b>Wall mounted socket</b> with highly heat resistant contact carrier and nickel plated contacts, top and bottom entry  ☼ IP 67 Std. Pack. Qty: 10 Dimensions: page 10	16	3	3923		3767														
		16	4					3768												
		16	5					3769												
		32	3			3770														
		32	4					3771												
		32	5					3772												
	<b>Wall mounted socket</b> SoftCONTACT, with highly heat resistant contact carrier and nickel plated contacts, top and bottom entry  ☼ IP 67 Std. Pack. Qty: 5 Dimensions: page 10	63	4					3773												
		63	5					3774												
	<b>Wall mounted socket</b> with highly heat resistant contact carrier and nickel plated contacts, switched, with mechanical DUO-interlock  ☼ IP 67 Std. Pack. Qty: 10 Dimensions: page 11	16	3	7388		7283														
		16	4					7284												
		16	5					7285												
		32	3			7286														
		32	4					7287												
		32	5					7288												
	<b>Wall mounted socket</b> SoftCONTACT, with highly heat resistant contact carrier and nickel plated contacts, switched, with mechanical DUO-interlock  ☼ IP 67 Std. Pack. Qty: 1 Dimensions: page 11	63	4					7289												
		63	5					7290												
		125	5					7398												
	<b>Wall mounted socket</b> 63A: SoftCONTACT, with highly heat resistant contact carrier and nickel plated contacts, switched, with mechanical DUO-interlock, with DIN rail ☼ IP 67 Std. Pack. Qty: 1 Dimensions: page 11	16	3	7051ZC		7394														
		16	4					7291ZA												
		16	5					7292												
		32	3			7356														
		32	4					7293ZC												
		32	5					7294												
		63	4					7295												
		63	5					7296												

Service

Sockets

Plugs and connectors

Combination units

Special plugs and sockets, accessories