



Pushing Performance



People | Power | Partnership

HARTING Selection Guide

Han® F+B – A clean connection

Han® F+B Connector System

- Reduces costs because connectors shorten assembly times
- Supports flexible configuration of machines as well as modularisation
- Reduces downtimes thanks to "Plug & Produce" principle



Ecolab-certified



Hood and housing materials comply with FDA 21



Data, signal and power



Easy-to-clean design, caps of hood and bulkhead mounted housing can be screwed together, e.g. for cleaning



Insert

Adapter

Housing

Han® F+B connector



Highest protection class



Resistant to cold and heat

Technical characteristics

Material hood	PP
Material seal	TPE
Material housing	PP
Material gasket	EPDM
Material o-ring	silicone
Material cable gland	PA / silicone
Limiting temperature	-40°C ... 125°C
Mating cycles	≥ 500
Mating cycles with adapter 09 15 503 9911	≥ 250
Degree of Protection acc. to DIN EN 60529 for coupled connector	IP67 / IP69

Specifications and approvals

Materials according to FDA 21

Resistance, Ecolab-certified:

P3-topax 19
P3-topax 52
P3-topax 56
P3-topax 66
P3-topax 99
P3-topax 200

Benefits

- Helps reducing downtimes in food beverage industry
- Connectors are many times faster in plugging compared to hard wired solutions
- One type of hood or housing for all types of transmission in the industrial lifelines of data, signals and power
- Enables the modularisation of machines and plants as well as the introduction of future-proof concepts
- Reduces expenses on installation and maintenance of equipment as well as the resulting downtimes

Features

Easy-to-clean design based on standards ISO 14 159 und DIN EN 1672-2


Applications:

- Machines for food industry
- Bottling plants
- Packaging machines

Suitable for food processing zones:

- Interfaces inside the splash zone
- Resistant to chemical cleaning agents even at high cleaning density


System description

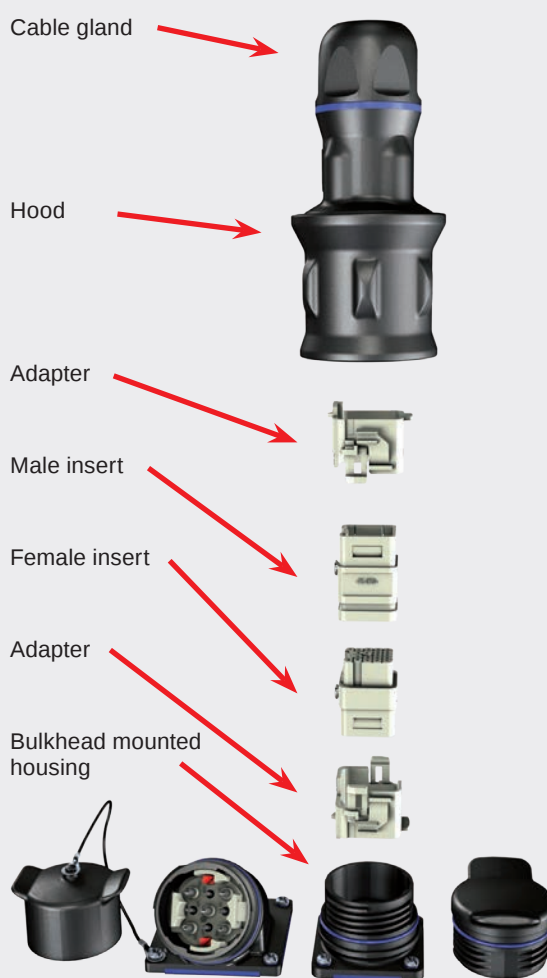

Notice:
Adapter required for Han® 3 A insert

Overview



Hoods and cable glands		Hood	Cover hood	Cable gland	
					
	Part number (black)	19 15 503 1403	09 15 503 5411	19 15 523 5196	19 15 503 5196
				Clamping range 11 - 13	Clamping range 11 - 13
				19 15 523 5197	19 15 503 5197
				Clamping range 13 - 16	Clamping range 13 - 16
	Part number (blue)	19 15 513 1403	09 15 513 5411	19 15 523 5199	19 15 503 5199
	Notice:		Cover can be screwed into cover hood for bulkhead mounted housing	Clamping range 16 - 18	Clamping range 16 - 18
				09 99 000 0984 Assembling aid cable gland F+B	

Housings and cable-to-cable hood		Bulkhead mounted housing, straight	Bulkhead mounted housing, angled	Cable-to-cable hood	Cover hood for bulkhead mounted housing	Bulkhead mounted housing, straight
						
	Part number (black)	09 15 503 0301	09 15 503 0901	19 15 503 1701	09 15 503 5401	09 15 503 0102
						
	Part number (blue)	09 15 513 0301	09 15 513 0901	19 15 513 1701	09 15 513 5401	09 15 513 0102

Cable side			
	Configuration example	Hood and cable gland 19 15 503 1403	Han® F+B 5E Screw 09 15 505 2601

	Han® F+B 4 / 4	Han® F+B 17D	Han® F+B 5E	Han® F+B 4 / 4 / 4
Contacts	4 + PE + 4	17 + PE	5 + PE	4 + PE + 4 + PE 4mm ²
Electrical data	20 A / 10 A / 400V / 250V	10 A / 400 V	16A / 600V	20 A / 10 A / 400V / 250V
Termination	Han® E / Han® D Crimp	Han® D	Han® E Screw	Han® E / Han® D Crimp
Cross section [mm ² / AWG]	4 mm ² / 2,5 mm ²	2,5 mm ²	2,5 mm ²	4 mm ² / 2,5 mm ²
Male	09 15 508 3001	09 15 517 3001	09 15 505 2601	09 15 512 3002
Female	09 15 508 3101	09 15 517 3101	09 15 505 2701	09 15 512 3102
Notice	No adapter necessary, Han® D and E contacts to be ordered separately			No adapter necessary, Han® D, E and Ethernet contacts to be ordered separately

Hybrid system cable				
	Cable side	Device side	Cable side	
up to 10 A	Contacts	20 A + PE	20 A + PE	400 V
	Electrical data	10 A / Cat. 5e	10 A / Cat. 5e	
	Cable assembly	Han F+B Hybrid system cable	Han F+B Hybrid device side	Han® F+B 17 D system cable
	Wire design	5G 2,5 mm ² / 2 x 1,5 mm ² / 2 x 0,75 mm ² / 2 x 2 AWG 22	5G 2,5 mm ² / 2 x 1,5 mm ² / 2 x 0,75 mm ² / 2 x 2 AWG 22	17 x 0,5 mm ²
	Male	33 50 300 0140 050	33 50 399 8141 010	33 50 410 0306 050
	Female			
	Notice	Cable length 5 m	Wire length 1 m	Cable length 5 m

Termination technique	Screw terminal	Han-Quick Lock® termination	Crimp termination	Axial screw termination
	HARTING screw terminals are designed according to DIN EN 60999	Push the stranded wire into the Han-Quick Lock® contact chamber and push the actuator in until it comes to a stop!	Crimp connections are solder-free and tension-resistant, to be processed with crimping tool	For flexible conductors with large cross sections, special tools required
Drawing				
Tools	Screwdriver	Screwdriver	Crimping tool	Torque wrench

Cable assembly

There are not many industries that have such extensively high standards in their production than the food and drink industry. Hygiene regulations are not only applicable to connectors, but also cords and accessories. Cords need to be resistant towards physical load in order to guarantee a smooth and reliable operation. However, they also need to be able to resist aggressive cleaning chemicals, which are being used on a daily basis in different areas.

Device side	Setup of power and signal interface requires housings, adapter and insert				
	Configuration example	 Housing Han® F+B bulkhead mounted housing, straight 09 15 503 0301	 Adapter required for Han® 3 A insert 09 15 503 9911	 Insert Han® 7 D 09 21 007 3131	 Contacts Han® D 09 15 000 6201

40 A		Han® Q 2/0		Han® Q 2/0	
					
	Contacts	2 + PE		2 + PE	
	Electrical data	40 A / 400 V		40 A / 400 V	
	Termination	Axial screw		Crimp	
	Cross section [mm² / AWG]	2.5 ... 6 mm² / AWG 14-10		1.5 ... 10 mm² / AWG 16-8	
	Male	09 12 002 2653		09 12 002 3051	
	Female	09 12 002 2753		09 12 002 3151	
	Cross section [mm² / AWG]	4 ... 10 mm² / AWG 12-8			
	Male	09 12 002 2651			
	Female	09 12 002 2751			
	Notice	Insert incl. contacts		Han® C contacts to be ordered separately	


16 A		Han® Q 5/0 Crimp		Han® Q 5/0 Quick Lock	
					
	Contacts	5 + PE		5 + PE	
	Electrical data	16 A / 230 / 400 V		16 A / 230 / 400 V	
	Termination	Crimp		Quick Lock	
	Cross section [mm² / AWG]	0.14/0.5 ... 2.5 mm² / AWG 26/20-14		0.14/0.5 ... 2.5 mm² / AWG 26/20-14	
	Male	09 12 005 3004		09 12 005 2633	
	Female	09 12 005 3104		09 12 005 2733	
	Notice	Insert incl. contacts, crimp Han® E contacts to be ordered separately		Insert incl. contacts	

10 A		Han® 4 A		Han® 4 A Quick Lock		Han® 7 D		Han® 7 D Quick Lock	
									
	Contacts	4 + PE		4 + PE		7 + PE		7 + PE	
	Electrical data	10 A / 230 / 400 V		10 A / 230 / 400V		10 A / 250 V		10 A / 250 V	
	Termination	Screw terminal		Quick Lock		Crimp		Quick Lock	
	Cross section [mm² / AWG]	1.0 ... 2.5 mm² / AWG 18-14		0.5 ... 2.5 mm² / AWG 20-14		0.14 ... 2.5 mm² / AWG 26-14		0.14 ... 2.5 mm² / AWG 26-14	
	Male	09 20 004 2611		09 20 004 2633		09 21 007 3031		09 21 007 2632	
	Female	09 20 004 2711		09 20 004 2733		09 21 007 3131		09 21 007 2732	
	Notice	Insert incl. contacts		Insert incl. contacts		Han® D contacts to be ordered separately		Insert incl. contacts	

10 A		Han® High Density	Han® 3 A adapter
			
	Contacts	21	
	Electrical data	6.5 A / 50- 120 V	
	Termination	Crimp	
	Cross section [mm² / AWG]	0.09 ... 0.56 mm² / AWG 26-20	
	Male	09 12 021 3001	09 15 503 9911
	Female	09 12 021 3101	
Notice	D-Sub contacts to be ordered separately	required for Han® 3 A male and female inserts	

5 A – D-Sub	Cross section		Male contacts for Ethernet elements	Female contacts for Ethernet elements	Male (gold plated)	Female (gold plated)
	(mm ²)	(AWG)				
						
	0.09-0.25	28-24			09 67 000 7576	09 67 000 7476
	0.12-0.33	26-22	21 01 100 9020	21 01 100 9025		
	0.13-0.33	26-22			09 67 000 5576	09 67 000 5476
	0.25-0.52	24-20			09 67 000 8576	09 67 000 8476

10 A – Han® D	Cross section		Male (silver plated)	Female (silver plated)	Male (gold plated)	Female (gold plated)
	(mm ²)	(AWG)				
						
	0.14-0.37	26-22	09 15 000 6104	09 15 000 6204	09 15 000 6124	09 15 000 6224
	0.5	20	09 15 000 6103	09 15 000 6203	09 15 000 6123	09 15 000 6223
	0.75	18	09 15 000 6105	09 15 000 6205	09 15 000 6125	09 15 000 6225
	1	18	09 15 000 6102	09 15 000 6202	09 15 000 6122	09 15 000 6222
	1.5	16	09 15 000 6101	09 15 000 6201	09 15 000 6121	09 15 000 6221
	2.5	14	09 15 000 6106	09 15 000 6206	09 15 000 6126	09 15 000 6226

16 / 20 A – Han® E	Cross section		Male (silver plated)	Female (silver plated)	Male (gold plated)	Female (gold plated)
	(mm ²)	(AWG)				
						
	0.14-0.37	26-22	09 33 000 6127	09 33 000 6227	09 33 000 6117	09 33 000 6217
	0.5	20	09 33 000 6121	09 33 000 6220	09 33 000 6122	09 33 000 6222
	0.75	18	09 33 000 6114	09 33 000 6214	09 33 000 6115	09 33 000 6215
	1	18	09 33 000 6105	09 33 000 6205	09 33 000 6118	09 33 000 6218
	1.5	16	09 33 000 6104	09 33 000 6204	09 33 000 6116	09 33 000 6216
	2.5	14	09 33 000 6102	09 33 000 6202	09 33 000 6123	09 33 000 6223
	3	12	09 33 000 6106	09 33 000 6206		
	4	12	09 33 000 6107	09 33 000 6207	09 33 000 6119	09 33 000 6221

40 A – Han® C	Cross section		Male (silver plated)	Female (silver plated)		
	(mm ²)	(AWG)				
						
	1.5	16	09 32 000 6104	09 32 000 6204		
	2.5	14	09 32 000 6105	09 32 000 6205		
	4	12	09 32 000 6107	09 32 000 6207		
	6	10	09 32 000 6108	09 32 000 6208		
	10	8	09 32 000 6109	09 32 000 6209		

Crimping tools	Part numbers	09 99 000 0501	09 99 000 0377	09 99 000 0888	09 99 000 0898
					for shielding ferrules 
	Contacts	D-Sub 0.09-0.52	Han® C 6.0-10.0 Han® C 4.0-40.0	Han® D 0.14-2.5 Han® E 0.14-4.0 Han® C 1.5-4.0	
	Cross section [mm ²]				
	Locator for Ethernet	61 03 600 0023			09 99 000 0637
	Locator for D-Sub	09 99 000 0531			09 99 000 0637

Axial screw termination tools	Hex key	T-handle hex key	Bit 1/4"	Hex key torque set	Others
					
	2 mm (40 A) 2.5 mm (70 A)	09 99 000 0313	09 99 000 0369 09 99 000 0375	09 99 000 0834 09 99 000 0834	

Others	Han® F+B removal tool
	 for circular inserts 09 99 000 0997

Configuration example	Plug		Socket	
	 Hood and adapter Han® F+B and RJ45 adapter 19 15 503 1403		 Socket Cat. 6, IDC 09 45 545 1561	
				
	 Plug Cat. 6, IDC 09 45 100 1560		 Bulkhead mounted housing, straight 09 15 503 0301	
	09 15 503 9911		09 45 515 0024	

RJ45 male side		Cat. 5 - 4 poles IDC	Cat. 6 - 8 poles IDC	Cat. 5/6 - 4/8 poles preLink
				
	Classification	RJ45 contact insert	RJ45 contact insert	RJ45 contact insert
	Transmission rate	10/100 mbit	1/10 Gbit	1/10 Gbit
	AWG	26-22	27-22	27-22
	Part number	09 45 100 1100	09 45 100 1560	20 82 002 0001
	PreLink Block yellow AWG 23/22			20 82 000 0001
	PreLink Block white AWG 27/26			20 82 000 0002
	Han® F+B 3A adapter	09 15 503 9911	09 15 503 9911	09 15 503 9911

RJ45 female side		Cat. 5 - 4 poles IDC	Cat. 6 - 8 poles IDC	Cat. 5/6 - 4/8 poles preLink
				
	Classification	RJ45 female insert	RJ45 female insert	RJ45
	Transmission rate	10/100 mbit	1/10 Gbit	1/10 Gbit
	AWG	24-22	28-22	
	Part number	09 45 545 1120	09 45 545 1560	20 82 001 0001
	PreLink Block yellow AWG 23/22			20 82 000 0001
	PreLink Block white AWG 27/26			20 82 000 0002
	Han® HIFF adapter	09 45 515 0024	09 45 515 0024	09 45 515 0024
	Han® F+B 3A adapter	09 15 503 9911	09 15 503 9911	09 15 503 9911

RJ45 female insert		Cat. 6 coupler 8 poles	Others	Tool
				 HA-VIS preLink® assembly tool
	Classification	RJ45 coupler Bu/Bu		20 82 000 9901
	Transmission rate	100 Mbit - 10 Gbit		
	Part number male / female	09 45 200 1560		
	Han® F+B 3A adapter	09 15 503 9911		



Pushing Performance

HARTING.com –
the gateway to your
country website.

HARTING Technology Group

info@HARTING.com

www.HARTING.com