


## CIRCULAR CONNECTORS



SIGNAL // POWER // INDUSTRIAL ETHERNET

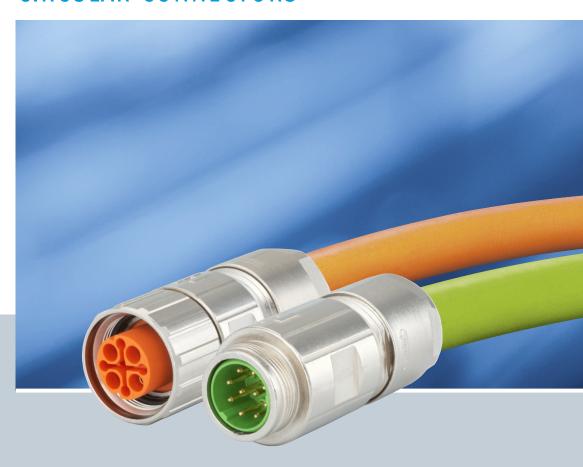

# HUMMEL — smart & reliable






## TABLE OF CONTENT





| HUMMEL Highlights: product features | ▶6   |
|-------------------------------------|------|
|                                     |      |
| Technical Information               | ▶10  |
|                                     |      |
| HUMMEL International                | ▶ 30 |





## Further information can be found in our Technical Centre at www.hummel.com



https://www.hummel.com/en/circular-connectors/technical-center



HUGE RANGE: M 12 - M 40



M 12 Power M 23 Signal Connectors

Note: The state of the

## CIRCULAR CONNECTORS

PROFINET Customized Solutions

Industrial Ethernet M 16 M 23 RJ 45 M 40
TWILOCK Moulded Cordsets

M 23 Hybrid














File-No. E 213337

# TWILOCK / TWILOCK-S

- // Quick Connect with Polygon Lock
- // Multi functional: Ideal with TWILOCK and screw connection
- // Easy handling, exceptional functionality
- // Resistant to vibration



Clearly defined: OPEN — CLOSE



Multi functional: Special thread allows use of TWILOCK and screw connection



Locking with a slight rotation or release of the connection









### M16 HC: Same performance, less space required

Efficiency, sustainability and miniaturization are present industrial trends. Applications are getting more compact while in decreasing installation spaces the same or even more power has to be accommodated. The high performance-connector M16 HC fully meets these performance requirements. This connector is about one third smaller than the comparable M23 connectors, but at the same time capable of transmitting the same power-currents. The M16-HC-Connectors are available in numerous housing designs such as overmoulded, PCB or stainless steel versions.

- // High power transmission up to 25 A
- // Less space required
- // Cost-optimised assembly directly on the PCB possible
- // UL approval
- // Higher energy efficiency

| 116HC              | Signal      | Power DC | Power AC |
|--------------------|-------------|----------|----------|
| Number of contacts | 4           | 4        | 3+PE     |
| Contact-Ø [mm]     | 0,8         | 1,6      | 1,6      |
| AWG [mm²]          | 0,08 - 0,34 | 2,5      | 2,5      |
| Nominal current    | 5 A         | 25 A     | 25 A     |
| Nominal voltage    | 48 V        | 48 V     | 320 V    |
|                    |             |          |          |





### **TWINTUS: Connector 4 small Drives**

The TWINTUS connectors combines high power performance with low space requirements in only one housing. Herewith TWINTUS offers an economically attractive solution even to the smallest servomotors. Based on the dimensions of only 22 mm height and with a width of 41 mm it can be assembled in tight and limited spaces, fully fullfilling the requirements of the miniaturization trend.

The connector-systems of HUMMEL are offering a modular setup. Housing and inserts can be combined within their particular product line. For TWINTUS this results in plenty of combinations with the available M16 inserts. In addition, M12 sockets are available for signal transmission in 8-pin or 12-pin version.

- // Minimized Size
- // Free choice of Signal and Power Inserts
- $/\!\!/$  Flange 20 x 20 and 25 x 25





Colour coded inserts (DESINA colour code)



IP 67 (NEMA 4x) self sealing, even for threaded holes



Version M 16 / M 12 available



## TECHNICAL INFORMATION

### Rated curren

The rated current is the current that each contact of a connection can simultaneously transfer continuously.

### Rated voltage

The rated voltage is the voltage for which a connector is designed. In operation, the rated voltage is the maximum continuously applied voltage.

### Functional earth (FE)

Functional earth is an electrical conductor to ensure the functions and thus normal operation of installations and devices.

Functional earthing conductor: Earthing conductor provided for functional earthing.

**Functional earthing:** Earthing a point or points in a system or in an installation or in equipment, for purposes other than electrical safety.

### Protective earth (PE)

Protective earth is an electrical conductor provided for the purposes of sofety, for protection against electric shock. It is also called an earth conductor, earthing or "earth" for short. Its task in electric systems is to protect living beings in case of a fault.

PE conductor: Protective earth for the purposes of protective earthing

**Protective earthing:** Earthing a point or points in a system or in an installation or in equipment for purposes of electrical safety.

### **Contact overlapping**

The **contact overlapping** or wipe length of connectors generally denotes the possible overlap area of the pin and receptacle. The greater this area, the more reliable the connection is due to higher possible tolerance allowance (tolerance compensation)

To ensure the IP degree of protection and the necessary contact overlapping, at HUMMEL the cable and coupling connectors must be fully engaged and locked.

### Test voltage

The **test voltage** is the voltage that a connector must withstand under certain specifications without flashover or disruptive discharge via or through the insulation and at least corresponds to the r.m.s. withstand voltage in EN 61984.

The value of the test voltage is higher than the rated withstand voltage and serves to verify the dielectric strength of the connector.

### Connector

Connectors that are designed to be engaged or disengaged in normal use when live or under load. These are also called connectors with breaking capacity (CBC). A classic example in households is the SCHUKO plug (earthed 2-pin plug).

Connectors that are not deemed to be engaged or disengaged in normal use when under load or live are also named COC (connectors without breaking capacity).

HUMMEL connectors are usually classified as COC, i.e. they may not be engaged or disengaged when live or under load!

### **Mating Cycles**

One insertion and withdrawal (engaging and disengaging) of connectors is called a mating cycle (also called a cycle of mechanical operation or engaging cycle). The number of mating cycles is an important characteristic for connectors and plugs. It defines the life of a connector during which there is no loss in its transfer/transmission quality. The number of mating cycles is influenced above all by the quality of the contact surface. Use of high-quality and durable contact coatings reduces surface abrasion on mating.

### Pollution degree

The **pollution degree** is a numerical value that indicates the level of pollution expected in the micro-environment and is a parameter used in the design of clearances and creepage distances of electrical equipment. It denotes the potential pollution of an open, unengaged connector in a specific environment. The EN 60664-1 standard differentiates between four categories:

- Pollution degree 1: No pollution or only dry, non-conductive pollution occurs. The pollution has no influence
- Pollution degree 2: Only non-conductive pollution occurs. Occasionally, however, a temporary
  conductivity caused by condensation must be expected. (typical for households, business premises,
  laboratories or test greas.).
- Pollution degree 3: Conductive pollution occurs or dry non-conductive pollution occurs, which becomes
  conductive due to condensation which is to be expected. (typical for industrial firms or workshops.)
- Pollution degree 4: Continuous conductivity occurs due to conductive dust, rain or other wet conditions.
   If connectors are used under a higher pollution degree, the voltage values must be reduced. Contact our technical specialists to find out more.

### Safety note

In case of operating voltages greater than 50 volt, the connectors listed in this catalogue must be used with conducting housing parts in accordance with the safety provisions of DIN VDE 0100-410; IEC 60364-4-41. These safety provisions specify that relevant connectors may not be engaged or disengaged when live. Otherwise, no protection against electric shock is ensured.

•

### Further information is available on our website:

https://www.hummel.com/en/circular-connectors/technical-center-circular-connectors/aeneral-technical-information



HUMMEL connectors may not be engaged or disengaged when live or under load. To ensure the IP degree of protection (IP rating) and the necessary contact overlapping, the cable and coupling connectors must be fully engaged and locked.



## M 16 CONNECTORS

Traditionally M 16 Connectors are very popular with its users. The reason for that is high capability with a low space requirement. A special version is TWINTUS. This compact connector is able to combine signal and power for small drives within one housing.

- // M 16 power connector
- // M 16 signal connector
- // TWILOCK, quick release fastener
- // TWINTUS Connector 4 small drives





### **Product overview**









## Technical Data


| Mechanical Data                     | Materials and Technical Data   |
|-------------------------------------|--|
| Housing                             | Copper-Zinc alloy Die Cast   |
| Housing surface                     | Nickel plated (Standard), other surface upon request                                     |
| Inserts (for contacts)              | Thermoplastic Polyamid PA 6 (Nylon 6/6), PBT Fire protection class V-0                   |
| Contacts                            | Brass Alloy  |
| Contact surface at point of contact | Nickel and gold plated (0,25 µm)   |
| Minimum mating cycles               | >1000*   |
| Seals / O-Rings                     | Buna-N standard, optional Viton® (FPM / FKM) (Viton is a registered trademark of DuPont) |
| Temperature range                   | -40 °C - 125 °C (-40 °F - 257 °F)  |
| Type of contacts                    | Crimp, dip-solder (PCB) (for printed circuit boards)                                     |
| Protection                          | IP 67 / IP 69K per EN 60 529 (connected), NEMA 4x  |
| Cable diameter range                | 2 – 11 mm (.08 – .43")   |


| Number of positions                      | 3 (3 x 1 mm) | 3 (3 x 2 mm) | 4 + 3 + F   | PE/320 V        | 4 + 3 + F   | PE/600V     |
|--|--------------|--------------|-------------|-----------------|-------------|-------------|
| Number of contacts                       | 3            | 3            | 4           | 4               | 4           | 4           |
| Contact-Ø [mm]                           | 1            | 2            | 0,8         | 1,6             | 0,8         | 1,25        |
| AWG [mm <sup>2</sup> ]                   | 0,14 - 1     | 0,5-2,5      | 0.08 - 0.34 | 0,34 - 1,5      | 0.08 - 0.34 | 0,5 - 1,5   |
| Nominal current 1) [A]                   | 8            | 20           | 5           | 16              | 5           | 16          |
| Nominal voltage 2) [V~] *)               | 250          | 250          | 160         | 320             | 160         | 600         |
| Rated Surge Voltage [V~]                 | 2500         | 2500         | 2500        | 2500            | 2500        | 4000        |
| Test voltage (Breakdown voltage) 3) [V~] | 1500         | 1500         | 1500        | 1500            | 1500        | 2500        |
| Insulation resistance $[\Omega]$         | >108         | >108         | >           | 108             | >1          | 08          |
| Max. contact resistance $[m\Omega]$      | 3            | 3            | 3           | 3               | 3           | 3           |
| Number of positions                      |              | 6+PE         | 10          | 12 -            | + 3         | 18          |
| Number of contacts                       |              | 7            | 10          | 12              | 3           | 18          |
| Contact-Ø [mm]                           |              | 1,25         | 1           | 0,8             | 1,25        | 0,8         |
| AWG [mm <sup>2</sup> ]                   |              | 0.5 - 1.5    | 0,14 - 0,75 | 0.08 - 0.34     | 0.5 - 1.5   | 0.08 - 0.34 |
| Nominal current 1) [A]                   |              | 16           | 8           | 3               | 10          | 3           |
| Nominal voltage 2) [V~] *)               |              | 500          | 40          | 24              | 60          | 24          |
| Rated Surge Voltage [V~]                 |              | 2500         | 800         | 800             | 1500        | 800         |
| Test voltage (Breakdown voltage) 3) [V~] |              | 1500         | 500         | 400             | 840         | 400         |
| Insulation resistance $[\Omega]$         |              | >108         | >108        | >1              |             | >108        |
| Max. contact resistance $[m\Omega]$      |              | 3            | 3           | 3               | 3           | 3           |
| Number of positions MIGHC                |              |              | 4 + 3 +     | PE / 320 V (HC) | 4 + 4       | (HC)        |
| Number of contacts                       |              |              | 4           | 4               | 4           | 4           |
| Contact-Ø [mm]                           |              |              | 0,8         | 1,6             | 0,8         | 1,6         |
| AWG [mm <sup>2</sup> ]                   |              |              | 0.08 - 0.34 | 2,5             | 0.08 - 0.34 | 2,5         |
| Nominal current 1) [A]                   |              |              | 5           | 25              | 5           | 25          |
| Nominal voltage 2) [V~] *)               |              |              | 48          | 320             | 48          | 48 (DC)     |
| Rated Surge Voltage [V~]                 |              |              | 2500        | 2500            | 2500        | 2500        |
| Test voltage (Breakdown voltage) 3) [V~] |              |              | 1500        | 1500            | 1500        | 1500        |
| Insulation resistance $[\Omega]$         |              |              | >           |                 | >1          |             |
| Max. contact resistance $[m\Omega]$      |              |              | 3           | 3               | 3           | 3           |






### **Housings**

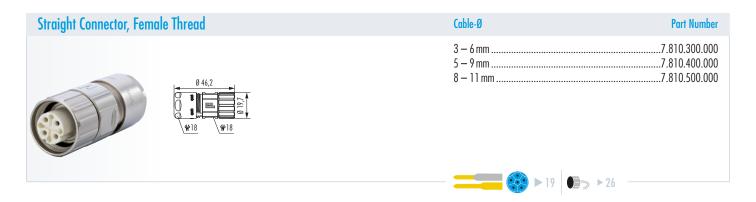

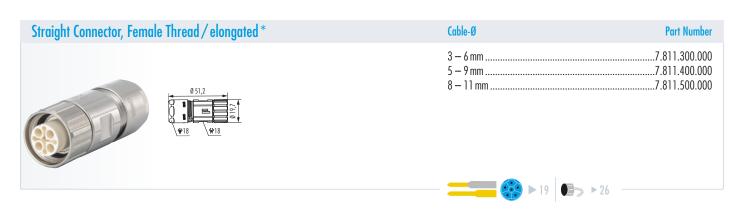

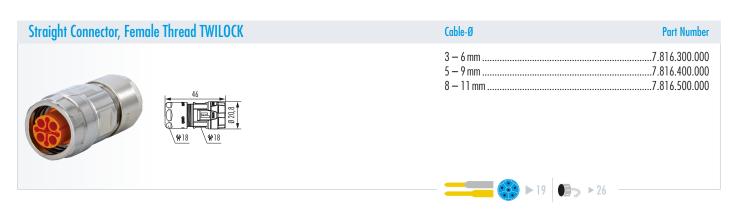















### Housings

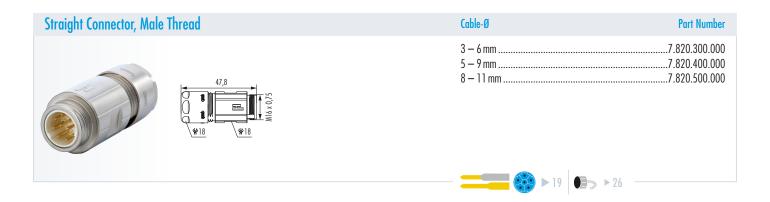

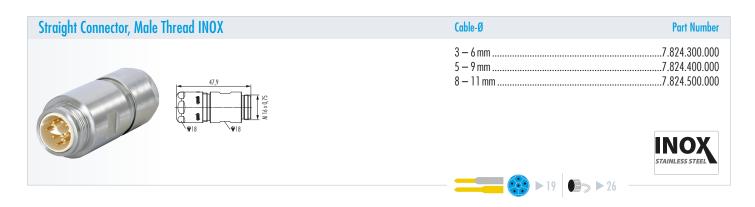

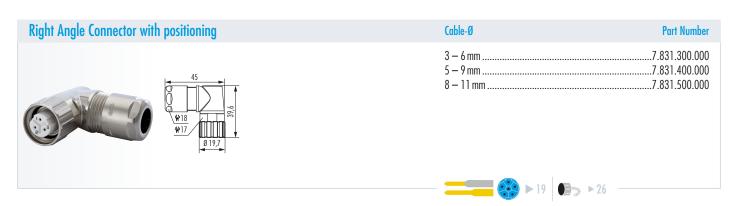


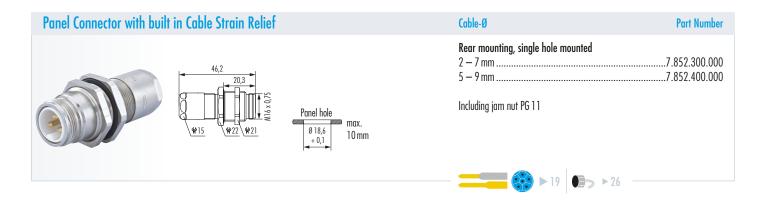








### **Housings**

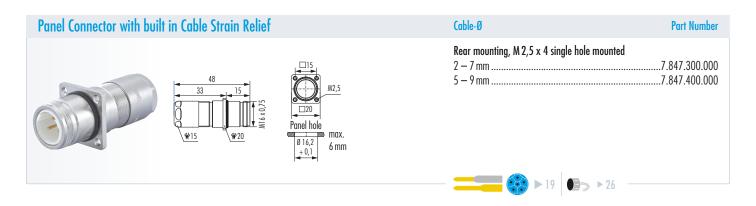

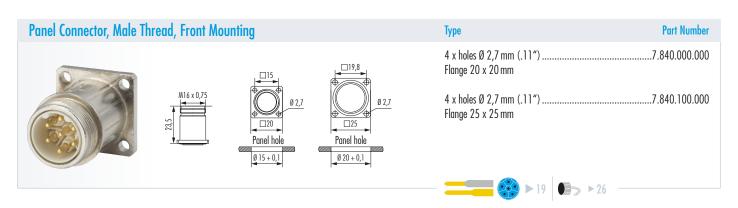

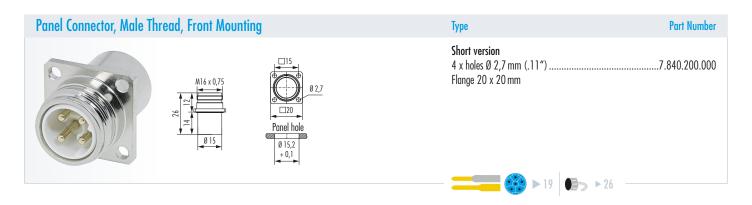

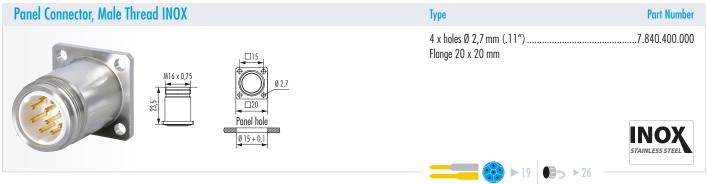













### Housings

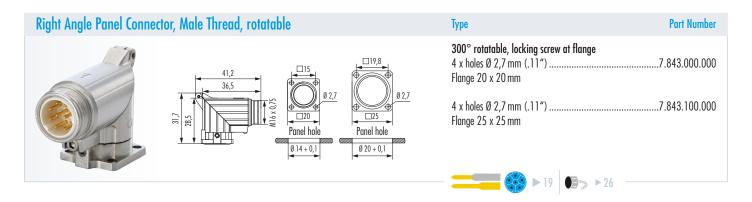

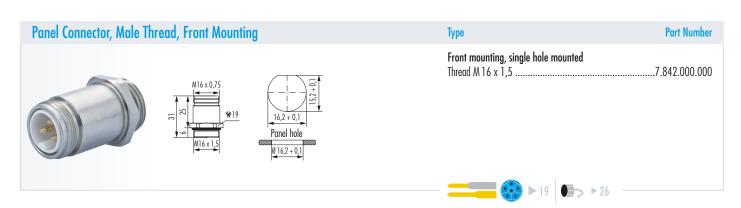

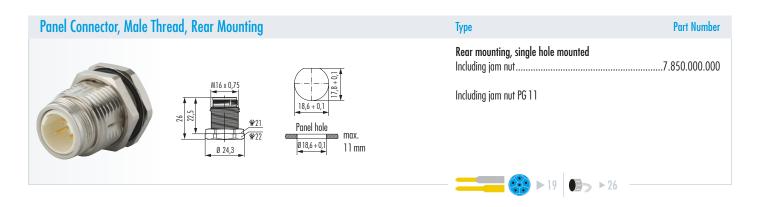


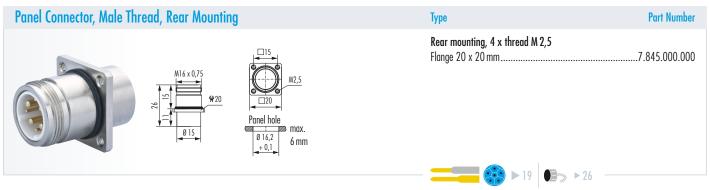








### **Housings M 16**

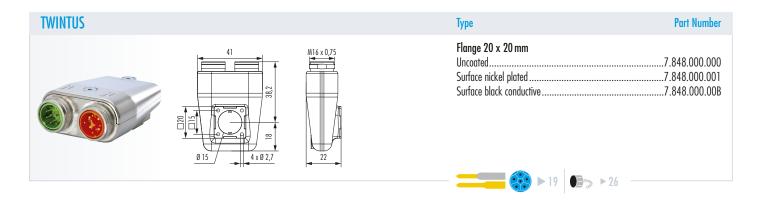

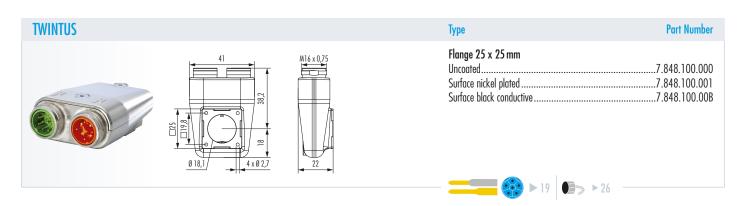

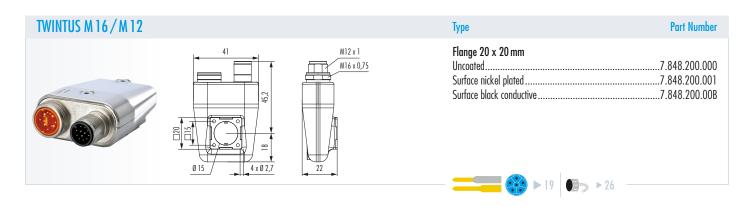

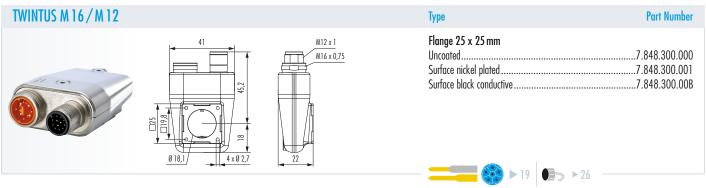







### **Inserts / Pinouts**

| Inserts 3-pole (3 x 1 mm) | Туре   | Part Number               | Part Number              |
|---------------------------|--|---------------------------|--------------------------|
|                           | Insert without contacts                      | <b>Pins</b> 7.003.903.101 | Sockets<br>7.003.903.102 |
| Insert pin mating view    | Insert with dip solder contacts Length 10 mm | 7.001.903.127             | 7.001.903.108            |
|                           | Insert with dip solder contacts Length 17 mm | 7.001.903.137             | 7.001.903.118            |
| Insert socket mating view | Required Contacts 3 x 1 mm                   | 7.010.901.0017.010.9      | 01.002/7.010.901.012     |
| 4.8                       |  |                           |                          |
|                           | <b>→</b> 24                                  |                           |                          |








### **Inserts / Pinouts**

| Туре   | Part Number  | Part Number                     |
|--|--|---------------------------------|
| Insert without contacts                      | <b>Pins</b><br>7.003.943.101   | <b>Sockets</b><br>7.003.943.102 |
| Insert RAL 2003 (DESINA orange) without cont | racts7.053.943.101   | 7.053.943.102                   |
| Insert with dip solder contacts Length 10 mm | 7.001.943.127  | 7.001.943.108                   |
| Insert with dip solder contacts Length 17 mm | 7.001.943.137  | 7.001.943.118                   |
| Required Contacts 4 x 0,8 mm                 | 7.010.980.801  | 7.010.980.802                   |
|  | 7.010.981.601  | 7.010.981.602                   |
| 4 x 0,8 mm                                   | 7.010.980.801<br>7.011.981.601   | 7.010.980.802<br>7.011.981.602  |
|  |  | /M16HC                          |
|  | Insert without contacts  Insert RAL 2003 (DESINA orange) without cont Insert with dip solder contacts Length 10 mm  Insert with dip solder contacts Length 17 mm  Required Contacts 4 x 0,8 mm 4 x 1,6 mm  Version HC — Required Contacts 4 x 0,8 mm | Pins                            |

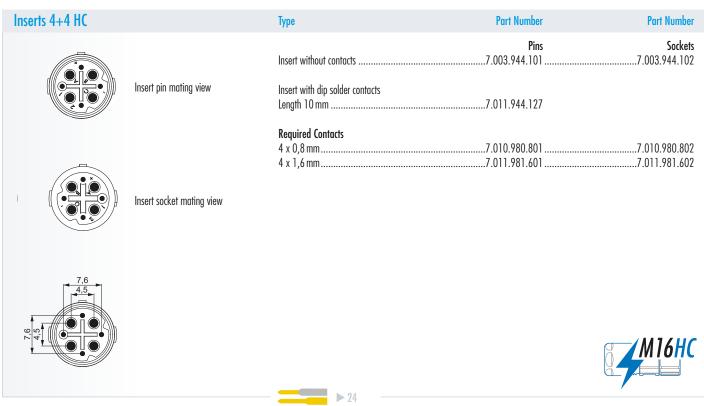




**Inserts / Pinouts** 



## Inserts 4+3+PE, 600 V **Part Number Part Number** Type Pins Sockets Insert pin mating view **Required Contacts** Insert socket mating view

<sup>1)</sup> under development

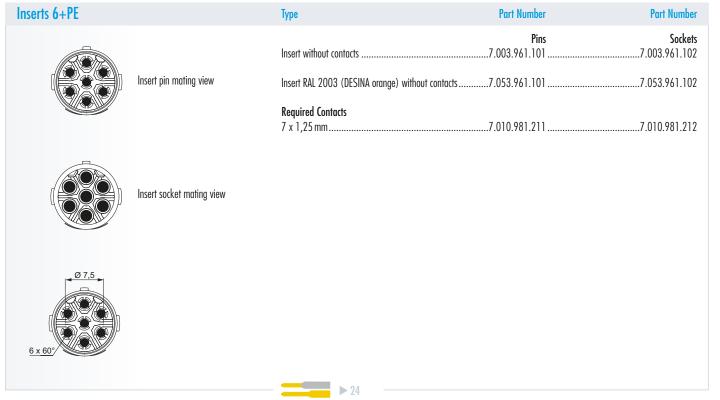

<sup>1)</sup> under development






### **Inserts / Pinouts**

| Inserts 10-pole            |                           | Туре  | Part Number                  | Part Number                  |
|----------------------------|---------------------------|---|------------------------------|------------------------------|
|                            |                           | Insert without contacts                         | <b>Pins</b><br>7.003.910.101 | <b>Sockets</b> 7.003.910.102 |
|                            | Insert pin mating view    | Insert RAL 2003 (DESINA green) without contacts | 7.053.910.101                | 7.053.910.102                |
| <b>1 1 1 1 1 1 1 1 1 1</b> |                           | Insert with dip solder contacts<br>Length 10 mm | 7.001.910.127                | 7.001.910.108                |
|                            |                           | Insert with dip solder contacts<br>Length 17 mm | 7.001.910.137                | 7.001.910.118                |
| Insert socket              | Insert socket mating view | Required Contacts 10 x 1 mm                     | 7.010.981.001                | 7.010.981.002                |
| 2,9<br> 2,7                |                           |   |                              |                              |
| 6.00                       |                           |   |                              |                              |
|                            |                           | ▶ 24  |                              |                              |

<sup>1)</sup> under development

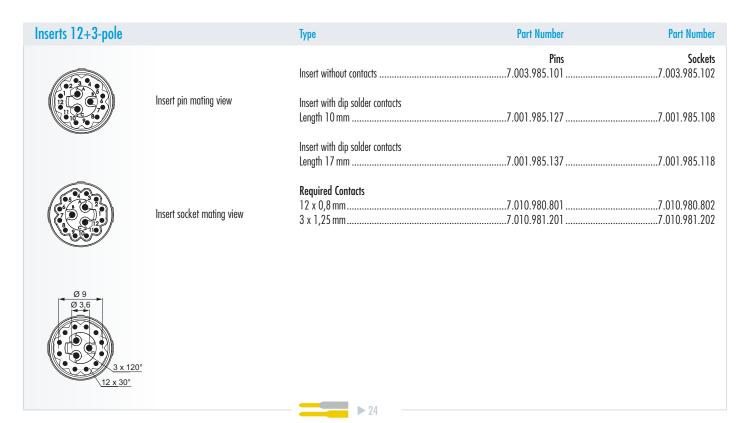





## (Hnmmer)

## Inserts / Pinouts

| Inserts 18-pole                         |                    | Туре  | Part Number                  | Part Number          |
|---|--------------------|---|------------------------------|----------------------|
| 02.93                                   |                    | Insert without contacts                         | <b>Pins</b><br>7.003.988.101 | Sockets7.003.988.102 |
| Insert                                  | pin mating view    | Insert RAL 2003 (DESINA green) without contacts | 7.053.988.101                | 7.053.988.102        |
|   |                    | Insert with dip solder contacts Length 10 mm    | 7.001.988.127                | 7.001.988.108        |
|   |                    | Insert with dip solder contacts<br>Length 17 mm | 7.001.988.137                | 7.001.988.118        |
| Insert socket n                         | socket mating view | Required Contacts 18 x 0,8 mm                   | 7.010.980.801                | 7.010.980.802        |
| 2,3<br>0,6<br>12 x 30°                  |                    |   |                              |                      |
| 6 6 6 1 1 2 1 2 1 2 1 2 1 2 1 2 1 2 1 2 |                    |   |                              |                      |
|   |                    | <b>→</b> 24                                     |                              |                      |

| Inserts M 12 for TV | VINTUS M 16 / M 12 (8-poles) | Туре                        | Part Number                |
|---------------------|------------------------------|-----------------------------|----------------------------|
| 3                   | Insert pin mating view       | Insert with solder contacts | Pins<br>A712-7.001.908.103 |

| Inserts M 12 for T                | WINTUS M 16 / M 12 (12-poles) | Туре                        | Part Number                |
|-----------------------------------|-------------------------------|-----------------------------|----------------------------|
| 3 2 0 9<br>4 11 0 12 8<br>5 0 6 7 | Insert pin mating view        | Insert with solder contacts | Pins<br>A712-7.001.912.103 |
|                                   |                               |                             |                            |



## Contacts

| Contacts | Туре                           | Crimp Range                   | Part Number   |
|----------|--------------------------------|-------------------------------|---------------|
|          | Crimp pin 0,8 mm, machined     | 0,08 — 0,34 mm² (AWG 28 — 22) | 7.010.980.801 |
|          | Crimp socket 0,8 mm, machined  | 0,08 — 0,34 mm² (AWG 28 — 22) | 7.010.980.802 |
| 0        | Crimp pin 0,8 mm, machined     | 0,08 — 0,34 mm² (AWG 28 — 22) | 7.010.980.811 |
|          | Crimp socket 0,8 mm, machined  | 0,08 — 0,34 mm² (AWG 28 — 22) | 7.010.980.814 |
|          | Crimp pin 1 mm, machined       | 0,08 — 0,75 mm² (AWG 28 — 18) | 7.010.981.001 |
|          | Crimp socket 1 mm, machined    | 0,08 — 0,75 mm² (AWG 28 — 18) | 7.010.981.002 |
|          | Crimp pin 1 mm, machined       | 0,14 — 1 mm² (AWG 26 — 17)    | 7.010.901.001 |
|          | Crimp socket 1 mm, machined    | 0,08 — 0,56 mm² (AWG 28 — 20) | 7.010.901.012 |
|          | Crimp socket 1 mm, machined    | 0,34 — 1 mm² (AWG 22 — 17)    | 7.010.901.002 |
|          | Crimp pin 1,25 mm, machined    | 0,5 — 1,5 mm² (AWG 20 — 16)   | 7.010.981.201 |
|          | Crimp socket 1,25 mm, machined | 0,5 — 1,5 mm² (AWG 20 — 16)   | 7.010.981.202 |
|          |                                |                               |               |







## Contacts

| Contacts | Туре                             | Crimp Range                  | Part Number   |
|----------|----------------------------------|------------------------------|---------------|
|          | Crimp pin 1,25 mm, machined      | 0,34 — 1,5 mm² (AWG 20 — 16) | 7.010.981.211 |
|          | Crimp socket 1,25 mm, machined   | 0,34 — 1,5 mm² (AWG 20 — 16) | 7.010.981.212 |
|          | Crimp pin 1,6 mm, machined       | 0,34 — 1,5 mm² (AWG 22 — 16) | 7.010.981.601 |
|          | Crimp socket 1,6 mm, machined    | 0,34 — 1,5 mm² (AWG 22 — 16) | 7.010.981.602 |
|          | Crimp pin 2 mm, machined         | 1,0 — 2,5 mm² (AWG 17 — 14)  | 7.010.982.001 |
|          | Crimp socket 2 mm, machined      | 1,0 — 2,5 mm² (AWG 17 — 14)  | 7.010.982.002 |
|          | M16HC                            |                              |               |
|          | Crimp pin HC 1,6 mm, machined    | 2,5 mm²                      | 7.011.981.601 |
|          | Crimp socket HC 1,6 mm, machined | 2,5 mm²                      | 7.011.981.602 |
|          |                                  |                              |               |
|          |                                  |                              |               |
|          |                                  |                              |               |





## Accessories

| Accessories | Plastic protective cap for connectors with male thread with female thread                                 |                            |
|-------------|---|----------------------------|
|             | Brass protective cap for connectors with female thread  |                            |
|             | Brass protective cap for connectors with male thread  INOX protective cap for connectors with male thread |                            |
|             | Brass protective cap with chain for connectors with female thread Length 70 mm                            | 7.010.9S0.705 <sup>1</sup> |
|             | Brass protective cap with chain for connectors with male thread Length 70 mm                              | 7.010.9S0.704              |
|             | Crimp tool for manual crimping of machined crimp contacts for signal connectors M 16 and M 23             |                            |
|             | Locator for Crimping tool for crimp contact Series M16, separate  |                            |






### ... . .


Accessories

| Accessories | Туре   | Part Number   |
|-------------|--|---------------|
|             | Conduit adaptor Poleon DN 12   | 7.010.900.202 |
| [WINTER     | Plastic protective cap for TWINTUS TWINTUS M 16TWINTUS M 16 / M 12           |               |
|             | Disassembly Tool for crimp contacts 1,25 mm                                  | 7.010.900.151 |
| M12 to      | Tool Adapter for tightening or loosening knurled nuts for M 12 Power/M 16    | 7.010.900.191 |
| M12 to      | Tool Adapter for tightening or loosening knurled nuts M12 Power, cross knurl | 7.010.900.193 |
|             | Screw Tool, adjustable 0.5 — 1.7 Nm  | 7.010.900.190 |
|             |  |               |



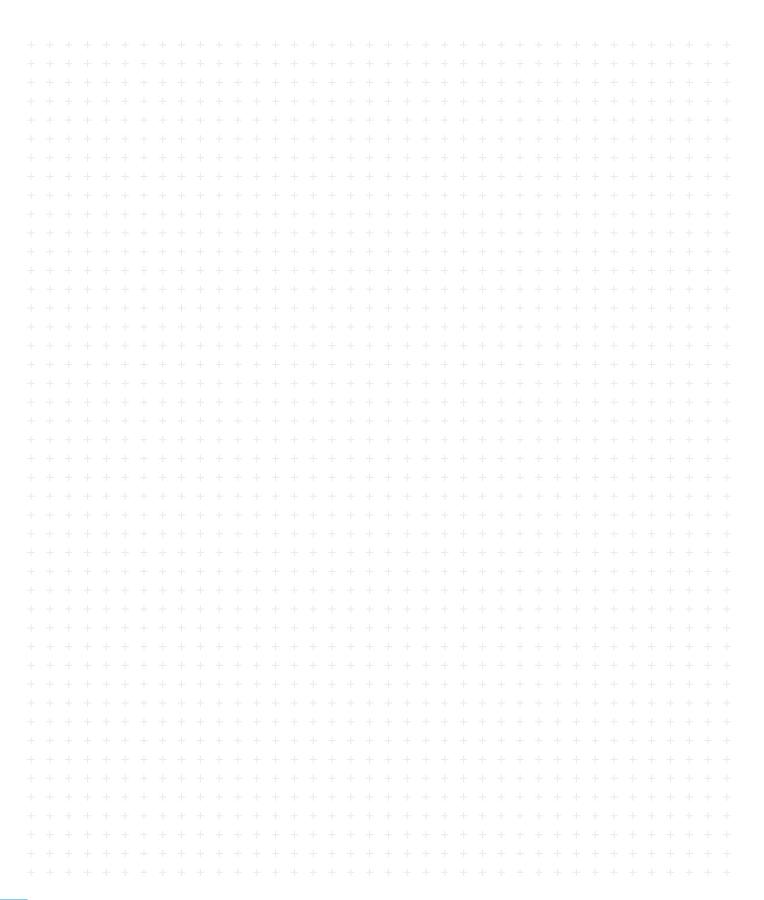



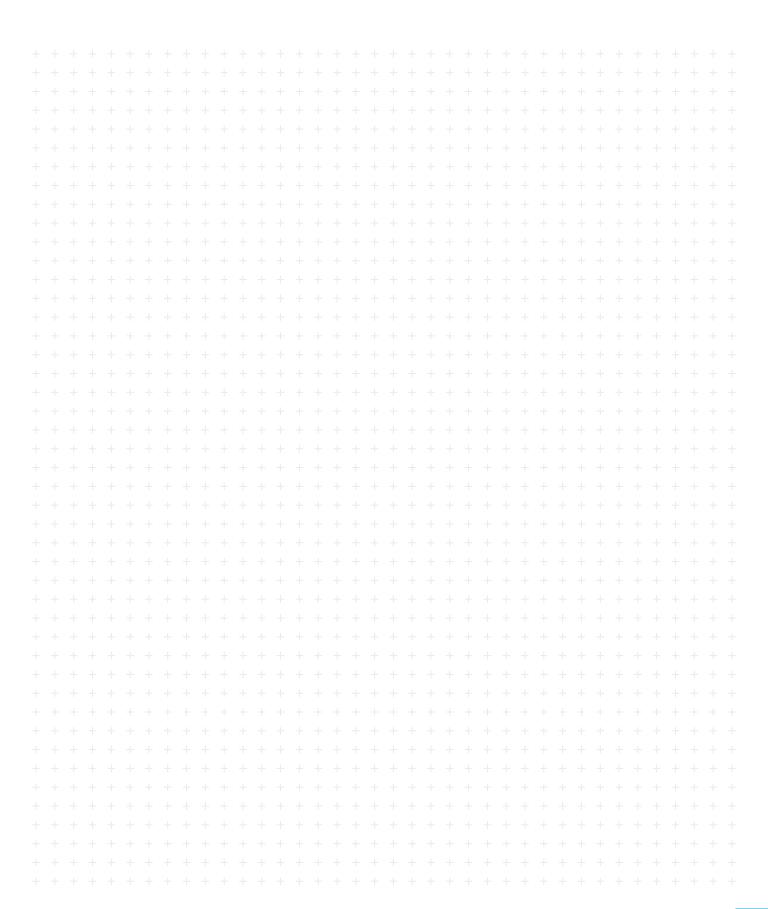

## Europe

### **HUMMEL France**

### **HUMMEL CONNECTEURS SAS**

ZI – Rue de l'Acqueline 51800 Sainte Ménéhould / France

Tel. +33 (0) 3 89 / 55 37 20 Fax +33 (0) 3 89 / 53 80 27 E-Mail info.fr@hummel.com www.hummel.com

### **HUMMEL UK**

### **HUMMEL UK Limited**

Office 3, Momentum House Enterprise Way, Lowton St Marys, Warrington, Cheshire, WA3 2BP United Kingdom

Tel. +44 (0) 19 42 / 60 56 95 Fax +44 (0) 19 42 / 26 93 24 E-Mail info.uk@hummel.com www.hummel.com

### **HUMMEL Italy**

### **HUMMEL S.r.l.**

Via Enrico Fermi 61 10091 Alpignano (Torino)/Italy

Tel. +39 (0) 11 / 9 68 26 38 Fax +39 (0) 11 / 9 78 55 50 E-Mail info.it@hummel.com www.hummel.com

### **HUMMEL Poland**

### HUMMEL Sales Office Poland Al. 23 Stycznia 26 lok. 20

AI. 23 Stycznia 26 lok. 20 86-300 Grudziadz / Poland

Tel. +48 (0) 6 62 / 38 27 99 Fax +48 (0) 56 / 6 43 00 11 E-Mail info.pl@hummel.com www.hummel.com

30

## Asia

### **HUMMEL China**

HUMMEL Connector Systems (Shanghai) Co., Ltd.
Room 1701 Central Plaza
No. 227 Human Bi. (N.) Road

No.227 Huang Pi (N) Road 200003 Shanghai / P.R. China

Tel. +86 (0) 21 / 63 75 85 51 Fax +86 (0) 21 / 63 75 85 53 E-Mail info.hcs.cn@hummel.com www.hummel.com

### **HUMMEL India**

### HUMMEL Connector Systems Pvt. Ltd.

1211, Surya Kiran Building, 19, Kasturba Gandhi Marg 110001 New Delhi/India

Tel: +91 (0).11 / 43 00 75-21 / -23 Fax +91 (0).11 / 43 00 75-22 E-Mail info.in@hummel.com www.hummel.com

### **HUMMEL South Korea**

### **HUMMEL AG KOREA**

#1711, the First Tower 2, 614, Dongton Giheung-ro, Hwaseong-si, Gyenggi-do 18469 Korea

Tel. +82 (0) 2 / 4 70 27 62 Fax +82 (0) 2 / 4 70 27 63 E-Mail info.kr@hummel.com www.hummelkorea.com

## South America

### **HUMMEL Brazil**

HUMMEL Connector Systems Ltda. Rua Derville Gabriel Pereira, 280 Barro Preto — Centro Empresarial Tatuí I CEP 18280-614 — Tatuí / SP / Brazil

Tel. +55 (0) 15 / 33 22 70 00 Fax +55 (0) 15 / 33 22 70 26 E-Mail vendas@hummel.com.br www.hummel.com.b





### **Limited Liability**

Products, design, colors and dimensions are subject to change without prior notice. We reserve the right to make technical improvements on all our products, currently ordered or for future orders. It is the users responsibility to verify all dimensions and technical data. HUMMEL AG will assume no liability regarding information provided to the user by published literature or inside technical staff, its distributors and outside sales personnel. Errors in the catalog can occur and shall not create any liability whatsoever for HUMMEL AG. All information provided by HUMMEL AG is without guarantee and must be verified by the user.

### **Imprint**

### Graphic & Layout:

HUMMEL AG, Marketing & Communications, Lise-Meitner-Str. 2, 79211 Denzlingen, Germany, Tel. +49 (0) 76 66 9 11 10-0, Fax +49 (0) 76 66 9 11 10-20, info@hummel.com

### Printer

Druckerei Furtwängler GmbH, 79211 Denzlingen, Germany, Tel. +49 (0) 76 66 / 13 31

## **ELECTRIC COMPONENTS**

## Cable Glands

Polyamide-, Brass- and Stainless steel, EMC-connections, Protection Ex e, Ex d, Ex ta



## **Circular Connectors**

M 12 Power to M 40, INOX, TWILOCK, Industrial Ethernet, Power, Signal, Hybrid-Connector, Moulded Cordsets





www.hummel.com