



BNC / BNC 75 HDTV / BNC-TRX

R141 / R142 / R266

Contents

Introduction	10-4 to 10-5
Interfaces	10-6 to 10-7
Characteristics	10-8 to 10-11
Finder guide	10-12 to 10-13

COMPOSITE BNC 75 HDTV

Plugs	10-14
-------------	-------

BNC 75 HDTV

Plugs	10-15
Jacks	10-16
Receptacles	10-16
Adapters	10-17

BNC 50Ω

Plugs	10-18 to 10-19
Jacks	10-19 to 10-21
Receptacles	10-22 to 10-24
Adapters	10-25 to 10-26
Caps	10-26

BNC 75Ω

Plugs	10-27 to 10-28
Jacks	10-28 to 10-29
Receptacles	10-30
Adapters	10-31

BNC-TRX

Characteristics	10-32
Plugs	10-32
Jacks	10-32
Receptacles	10-32
Panel drilling	10-33 to 10-34

SECTION 10 TABLE OF CONTENTS

Introduction



50Ω	DC -	4	GHz
	DC -	1.5	GHz (commercial)
	DC -	1.0	GHz (Eco)
	DC -	10	GHz (TRIAxIAL)
75Ω	DC -	1.5	GHz
	DC -	6	GHz (HDTV)
	DC -	1.0	GHz (Eco)

GENERAL

- Worldwide standardized coaxial connectors
- Bayonet coupling
- Proven strength and reliability
- Good RF performance

APPLICABLE STANDARDS

- MIL-C-39012 / MIL STD 348-A/301
- IEC 169-8
- CECC 22120
- NF-C-93564 KBN series
- UTE-C-93564

APPLICATIONS

- Civil and military radio-telecommunication equipment
- Test and measurement
- Videocommunication
- Broadcast
- Industrial network
- General electronics

The BNC connector is the most popular coaxial connector series in the world, featuring a two-pin bayonet coupling system for quick and reliable engagement and disengagement.

• Wide range:

RADIALL's BNC connectors are available with two characteristic impedances: 50Ω and 75Ω. They are completely intermateable. RADIALL also offers low-cost- BNC range, and a triaxial BNC TRX series.

• Convenient three piece design:

Straight and right angle crimp type cable connectors feature a three piece design: single piece body + center contact + outer ferrule.



Introduction

- **Fast and reliable cable attachment**

Cable connectors can be either fully crimped or soldered/crimped, offering full flexibility for fast, reliable, high-volume production with standard manual or pneumatic tooling.

- The center contact can be either crimped or soldered,
- The outer contact is attached to the cable by crimping a ferrule.

COMPOSITE BNC 75Ω HDTV CONNECTOR

GENERAL

- The first lightweight composite HDTV BNC available on the market
- Easy to connect and disconnect from the rear—ideal for high-density and recessed bulkhead applications
- Color-coded boots directly on the connector for easy video signal identification
- Guaranteed frequency up to 6 GHz for studio-quality performance
- 1000 mating cycles minimum for guaranteed durability in the field
- True 75Ω design

HDTV places new demands on maintaining high signal integrity at high data rates, from studio-quality broadcast production to video conferencing equipment, our selection of affordable HDTV BNC connectors offer more bandwidth, more performance, and are easier to use.

Our new technologically advanced high-speed composite BNC 75Ω HDTV connector features an incredible easy-to-use two-piece design that makes it easy to crimp on the cable. This new connector can handle data rates up to 3 Gbps or higher while meeting or exceeding SMPTE 292M and 424M standards. The gold plated center and outer contacts provide outstanding electrical performance with a frequency range of up to 6 GHz, and a low return loss of -32 dB at 3 GHz.

The connector comes in a wide variety of colors for signal cable identification and its special curved interface composite material design with positioning marks makes it easy and fast to connect in high-density and recessed bulkhead applications.

APPLICATIONS

- Broadcast TV stations and studios
- Video routing and production
- Video surveillance equipment
- Video conference equipment




BNC


BNC 75 HDTV/BNC 50Ω

Interface BNC 75 HDTV

JACK

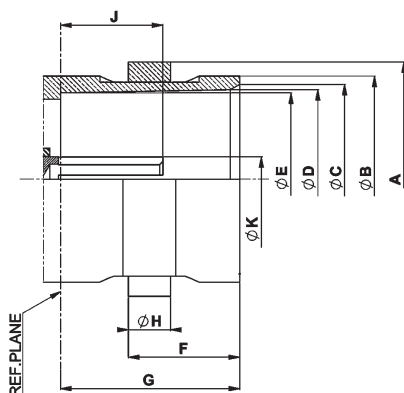

PLUG

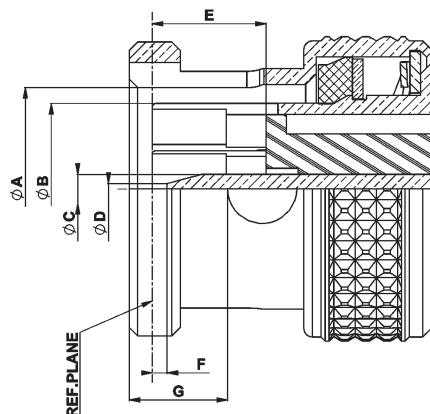


Letter	mm		inch	
	min.	max.	min.	max.
A	10.97	11.07	.432	.436
B	9.60	9.67	.378	.381
C	8.80	9.00	.346	.354
D	8.32	8.46	.328	.333
E	8.10	8.15	.319	.321
F	5.18	5.28	.204	.208
G	8.30	8.50	.327	.335
H	1.90	2.06	.075	.081
J	4.72	5.22	.186	.206
K	2.10	2.14	.083	.084


Letter	mm		inch	
	min.	max.	min.	max.
A	9.80	9.90	.386	.390
B	8.30	8.40	.327	.331
C	1.32	1.37	.052	.054
D	0.35	0.65	.014	.026
E	5.30	5.50	.209	.217
F	0.10	0.90	.004	.035
G	4.57	4.67	.180	.184

Interface BNC 50Ω

JACK

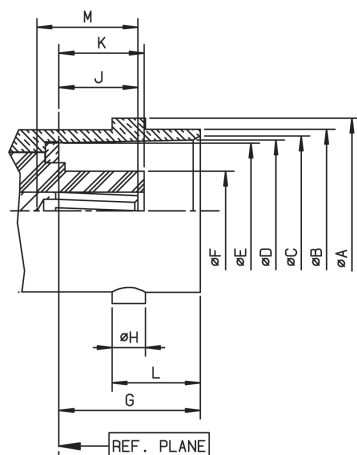

PLUG

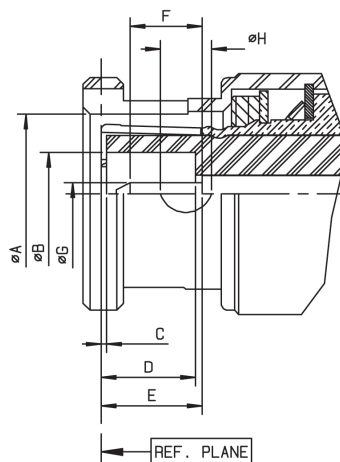


Interface BNC 50Ω

Letter	mm		inch	
	min.	max.	min.	max.
A DIA	10.97	11.07	.432	.436
B DIA	9.60	9.70	.378	.382
C DIA	8.79	9.04	.346	.356
D DIA	8.31	8.46	.327	.333
E DIA	8.10	8.15	.319	.321
F DIA	-	4.72	-	.186
G	8.31	8.51	.327	.335
H	1.91	2.06	.075	.081
J	4.72	5.23	.186	.206
K	4.78	5.28	.188	.208
L	5.18	5.28	.204	.208
M	4.95	-	.195	-

Letter	mm		inch	
	min.	max.	min.	max.
A DIA	9.78	9.91	.385	.390
B DIA	4.83	-	.190	-
C	0.15	-	.006	-
D	5.28	5.79	.208	.228
E	5.33	5.84	.210	.230
F	1.98	-	.078	-
G DIA	1.32	1.37	.052	.054
H DIA	2.31	2.46	.091	.097

Interface BNC 75Ω

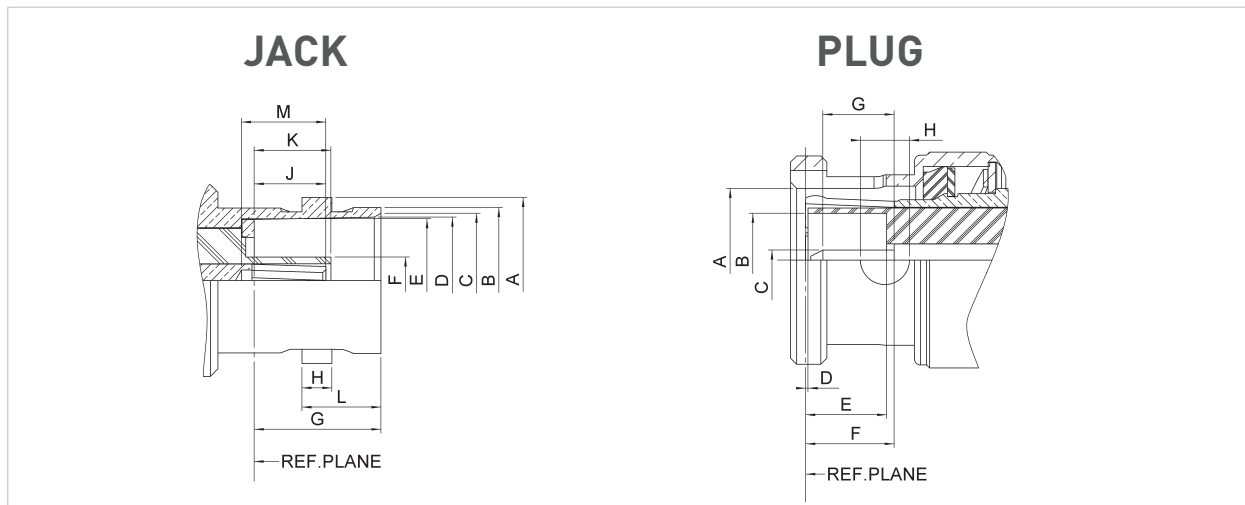

Letter	mm		inch	
	min.	max.	min.	max.
A DIA	10.97	11.07	.432	.436
B DIA	9.60	9.67	.378	.381
C DIA	8.80	9.00	.347	.354
D DIA	8.32	8.46	.328	.333
E DIA	8.10	8.15	.319	.321
F DIA	4.62	4.72	.182	.186
G	8.30	8.50	.326	.334
H	1.90	2.06	.074	.081
J	4.72	5.22	.186	.205
K	4.98	5.23	.196	.206
L	5.18	5.28	.204	.208
M	5.30	5.90	.209	.232

Letter	mm		inch	
	min.	max.	min.	max.
A DIA	9.80	9.90	.386	.389
B DIA	6.10	6.30	.240	.248
C DIA	1.32	1.37	.052	.054
D	0.05	-	.002	-
E	5.42	5.78	.213	.227
F	5.35	5.87	.211	.231
G	3.00	3.40	.118	.134
H DIA	3.15	3.35	.124	.132

BNC 50Ω/BNC 75Ω

Characteristics

ELECTRICAL CHARACTERISTICS

Frequency range	DC - 6 GHz (optimized at 3 GHz)		
Impedance	75Ω		
V.S.W.R. (max) Interface (plug + jack) Mated pair In series adapters	DC - 1.5 GHz 1.02 1.05 1.04	1.5 - 3 GHz 1.05 1.12 1.07	3 - 6 GHz 1.08 1.25 1.12
Working voltage	500 Vrms		
Dielectric withstanding voltage	1500 Vrms		
RF Leakage @ 1 GHz RF Leakage @ 3 GHz RF Leakage @ 6 GHz	75 dB 60 dB 50 dB		

MECHANICAL CHARACTERISTICS

Mating	Intermateable with 50Ω and 75Ω standard BNC connectors
Long life duration (mating endurance)	1000 cycles
Engagement force	13.6 N
Mating torque (bayonet)	28.6 N.cm
Coupling nut retention force	Axial force: 450 N Bending stress: 1000 N.cm
Center contact insertion force	10 N max
Vibration	MIL STD 202 Meth.204 cond B

ENVIRONMENTAL CHARACTERISTICS

Temperature range	-65°C + 165°C
Moisture resistance	MIL STD 202, Meth. 106 CECC 22000 paragraph 4.6.6
Corrosion resistance	MIL STD 202, Meth. 101 cond B (48 hours salt spray)

MATERIALS AND PLATING

Components	Materials	Platings
Body	Brass	NPGR/BBR/Nickel
Center contact	Brass or Beryllium copper	NPGR
Outer contact	Brass	NPGR
Insulator	PTFE	
Gasket	Silicone Rubber	

Composite version

CHARACTERISTICS

Frequency range	DC up to 6GHz
Impedance	75 Ω
VSWR	1.05 @ 3GHz (Return loss -32dB)
Mating Cycles	1000
Temperature Range	-40 °C ~ + 85 °C

MATERIAL AND PLATING

Parts	Materials	Plating
Coupling Nut	Composite	
Body	Brass	Gold
Outer contact	Brass	Gold
Center Contact	Brass	Gold
Insulator	PTFE	

Characteristics

BNC 50Ω

Test/characteristics	Standard reference	Values/remarks
----------------------	--------------------	----------------

ELECTRICAL CHARACTERISTICS

Impedance		50Ω		
Frequency range		DC - 4 GHz		
Typical V.S.W.R. straight models cable groupe: 2/50, 2.6/50, 5/50, 10 + 11/50, .141" right angle models: 2/50, 2.6/50, 5/50		1 GHz 1.12	2.5 GHz 1.18 1.30 max 1.20	4 GHz 1.22
Insertion loss straight connector right-angle connector		0.05 0.08	0.07 0.16	0.13 0.20
RF leakage		-55 dB min from 2 to 3 GHz		
Insulation resistance		5000 MΩ min		
Contact resistance center contact outer contact	MIL	1.5 mΩ 0.2 mΩ		
Working voltage in VRMS at sea level (at 21 000m)		500 125		
Dielectric withstanding voltage in VRMS at sea level (at 21 000m)		1500 375		
RF testing voltaage in VRMS sea level (5 MHz)		1000		

MECHANICAL CHARACTERISTICS

Durability		500 matings
Force to engage and disengage axial torque		13.6 N max 28.6 Ncm
Coupling nut retention force		445 N
Cable retention force cable 2/50, 2.6/50 cable 5/50, 10 + 11/50 cable .141"	MIL	227 N
Center contact retention force		27.2 N

ENVIRONMENTAL CHARACTERISTICS

Temperature range flexible cables semi-rigid cables		-65°C + 165°C -65°C + 105°C
Thermo cycling test		MIL STD 202, method 107, condition B
Thermal shock		MIL STD 202, method 107, condition B
High temperature endurance		MIL STD 202, method 108
Corrosion salt spray		MIL STD 202, method 101, condition B
Vibration		MIL STD 202, method 204, condition B
Shock		MIL STD 202, method 213, condition G
Moisture resistance		MIL STD 202, method 106
Hermetic test		MIL STD 202, method 112, condition C vacuum 10 ⁻⁶ Hgmm (Torr) leakage rate < 10 ⁻⁶ atm/cm ² /s
Barometric pressure		Pressure test: 3.5 bars; duration: 2 mn; temperature: 15°C to 25°C

MATERIALS AND PLATING

	Materials	Platings
Bodies	Brass	Nickel / BBR
Center contact male female	Brass Bronze or heat treated beryllium following QQ-C-530	Gold
Nut	Brass	
Insulator	PTFE	
Gasket	Silicon Rubber	

All dimensions are given in mm.

Characteristics

Test/characteristics	Standard reference	Values/remarks
----------------------	--------------------	----------------

ELECTRICAL CHARACTERISTICS

Impedance		75Ω
Frequency range		DC - 1.5 GHz
V.S.W.R. max straight models cable group: 2.6/75, 5/75, 6/75, 8/75, 10 + 11/75 right angle models: 2.6/75, 6/75		1.30 1.35
Insertion loss straight connector right-angle connector	MIL	0.2 dB max at 1 GHz 0.3 dB max at 1 GHz
RF leakage		-55 dB min from 2 to 3 GHz
Insulation resistance		5000 MΩ min
Contact resistance center contact outer contact		1.5 mΩ 0.2 mΩ
Working voltage in VRMS at sea level (at 21 000m)		500 125
Dielectric withstanding voltage in VRMS at sea level (at 21 000m)		1500 375
RF testing voltage in VRMS sea level (5 MHz)		1000

MECHANICAL CHARACTERISTICS

Durability	MIL	500 matings
Force to engage and disengage axial torque		13.6 N max 28.6 Ncm
Coupling nut retention force		445 N
Cable retention force cable 2.6/75, 5/75 6/75, 8/75, 10 + 11/75		340 N
Center contact retention force		27 N

ENVIRONMENTAL CHARACTERISTICS

Temperature range flexible cables	MIL	-65°C + 165°C
Thermo cycling test		MIL STD 202, method 107, condition B
High temperature endurance		MIL STD 202, method 108
Corrosion salt spray		MIL STD 202, method 101, condition B
Vibration		MIL STD 202, method 204, condition B
Shock		MIL STD 202, method 213, condition G
Moisture resistance		MIL STD 202, method 106
Hermetic test		MIL STD 202, method 112, condition C vacuum 10 ⁻⁶ Hgmm (Torr) leakage rate < 10 ⁻⁶ atm/cm ³ /s
Barometric pressure		Pressure test: 3.5 bars; duration: 2 mn; temperature: 15°C to 25°C

MATERIALS AND PLATING

	Materials	Platings
Bodies	Brass	Nickel
Center contact male female	Brass Bronze or heat treated beryllium following QQ-C-530	Gold
Nut	Brass	
Insulator	PTFE	
Gasket	Silicone Rubber	

Standard packaging = 100 pieces.

Characteristics**Commercial version R141 XXX 161 and R142 XXX161****ELECTRICAL CHARACTERISTICS**

	R141 XXX 161	R142 XXX 161
Impedance	50Ω	75Ω
Operating frequency	DC to 1.5 GHz	
Typical V.S.W.R. (1.5 GHz)	1.21	
straight models	Ø 2.6	1.14
	Ø 5	1.05
right angle models	Ø 6	1.17
	Ø 5 & Ø 6	
Testing voltage (VRMS)	1500	
Operating voltage (VRMS)	500	
Insulation resistance (MΩ)	5000	
Contact resistance (mΩ)	10	

MECHANICAL CHARACTERISTICS

Durability	100 matings
------------	-------------

ENVIRONMENTAL CHARACTERISTICS

Temperature range	-40°C + 85°C
-------------------	--------------

MATERIALS AND PLATING

	Materials	Platings
Male and female bodies	Brass	Nickel
Coupling nut	Die cast zinc	
Outer contact	Brass	
Insulators	Polypropylene	
Male and female center contacts	Brass	Gold

ECO version R141A XXX XXX and R142A XXX XXX**ELECTRICAL CHARACTERISTICS**

	R141A XXX XXX	R142A XXX XXX
Impedance	50Ω	75Ω
Frequency range	DC - 1 GHz	
Typical V.S.W.R. (straight models)	1.3 at 1 GHz	
Temperature range	-40°C / +85°C	
Durability	100 mating cycles	

MATERIALS AND PLATING

	Materials	Platings
Connector body	Brass/Die cast zinc	Nickel
Insulators	PTFE/Polypropylene	
Female center contacts	Phosphor bronze	Gold 0.1µm typical (Center contact)

PACKAGING

Packaging	100 pieces bulk Unit packaging
-----------	-----------------------------------

Standard packaging = 100 pieces.

All dimensions are given in mm.

Finder guide

CABLE CONNECTORS



Model	Straight plug		Right-angle plug		Straight jack		Square flange straight jack		Bulkhead straight jack	
Cable	Crimp and full crimp	Clamp	Crimp and full crimp	Clamp	Crimp and full crimp	Clamp	Crimp and full crimp	Clamp	Crimp and full crimp	Clamp
2/50/S (RG178)	R141 070 520	R141 003 000		R141 153 000				R141 253 000	R141 301 000 R141 303 503	R141 323 000
2.6/50/S (RG316)	R141 075 000 R141 075 161 R141A075 161	R141 004 000	R141 181 161	R141 154 000	R141 217 000		R141 290 200	R141 254 000 R141 277 000 R141 278 000	R141 306 000 R141 306 503 R141 331 500 R141A306 000	R141 304 000 R141 324 000 R141 324 000
2.6/50/D (RD316)		R141 004 000		R141 154 000				R141 254 000 R141 277 000 R141 278 000		R141 304 000 R141 324 000
2.6/75/S (RG179)	R142 076 000 R142 076 161 R142A076 161	R142 004 000		R142 154 000	R142 217 000			R141 254 000 R141 277 000 R141 278 000 R142 202 000	R142 306 500 R142 306 503 R142 331 011 R142A306 500	R141 304 000 R141 324 000
3.6/75/D (BT3002)	R142 081 120 R142 081 130 R142A081 130								R142A325 106	
5/50/S (RG58)	R141 072 000 R141 082 000 R141 082 161 R141A082 161	R141 007 000 R141 007 161 R141 008 000 R141 009 000 R141 010 000	R141 182 000 R141 182 161 R141 182 177	R141 156 000	R141 237 000 R141 237 161	R141 207 000 R141 208 000	R141 292 000	R141 256 000 R141 257 000 R141 258 000	R141 308 000 R141 332 500	R141 327 000
5/50/D (RG142)	R141 083 000	R141 008 000 R141 009 000 R141 010 000	R141 183 000	R141 156 000	R141 220 000	R141 207 000 R141 208 000		R141 258 000		R141 327 000
5/75/D	R142 083 000									
6/75/S (RG59)	R142 085 000 R142 085 161 R142A085 161	R141 012 000 R142 016 000 R142 016 161	R142 184 000 R142 184 161	R142 157 000	R142 242 000 R142 242 161			R141 261 000 R142 268 000	R142 334 161 R142A334 161	R142 329 000
8/75/S		R142 017 000								
10 + 11/50		R141 018 000								
10 + 11/75	R142 095 000	R142 018 000								
141" (RG402)		R141 052 000								R141 338 000 R141 338 007

CAPS

Model	Free	Cord	Chain	Short-circuit chain
Male	R141 802 000	R141 805 000	R141 812 000	R141 862 000
Female			R141 842 000	

Finder guide

RECEPTACLES

Model	Straight female flange		Right-angle female flange	Straight female bulkhead		Straight male flange	Straight male bulkhead	Press mount receptacles	PCB receptacles		
Cable	Square	2 hole	Square	Front mount	Right angle	Square	Front mount	Straight	Straight	Right angle	Bulkhead right angle
Solder contact with Solder pot	R141 403 000 R141 404 000 R141 406 000 R141 407 000 R141 410 000 R142 412 000	R141 453 000	R141 654 000	R141 554 000 R141 557 000 R141 559 000 R141 563 161 R141 572 000 R141 574 000 R141 574 161 R141 603 000 R141 605 000 R141 625 000 R142 562 000 R141A 605 000	R141 680 000	R141 440 000	R141 580 000				
Solder pins (standard space)									R141 426 000 R141 426 161 R141 426 168 R142 426 000	R141 665 000 R141 665 200	R141A 676 121
Solder pins (reduced space)									R142 500 230		
Press fit pins											R142 676 430 R142 684 130


IN-SERIES ADAPTERS

Model	Straight	Straight bulkhead	Straight flange	Right-angle	Tree	Cross
M-M	R141 703 000 R142 703 000					
F-F	R141 704 000 R142 704 000	R141 720 000 R141 723 000 R141 723 161 R141 730 000 R141 753 000 R142 720 000 R142 723 000 R141A 720 000 R142A 720 000	R141 710 000 R141 717 000 R142 710 000			
M-F				R141 770 000 R142 770 000		
F-F / M					R141 780 000 R141 789 000 R142 780 000 R142 789 000	
F-F / F					R141 782 000 R142 782 000	
M-F-F / F						R141 799 000

BNC

Plugs

STRAIGHT PLUGS CRIMP TYPE FOR FLEXIBLE CABLES

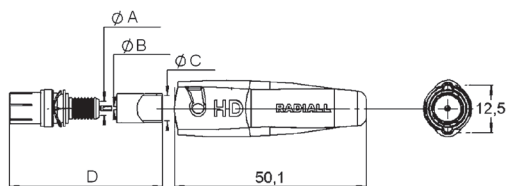

Cable group	Cable group dia.	Part number	Color	Dimensions			
				A	B	C	D
Mini RG59 Belden 1855A, DRAKA 0.6/2.8 CAE HD 0628	0.6/2.8	R142 079 750	Black	2.85	0.65	5.42	26.7
		R142 079 751	Red				
		R142 079 752	Green				
		R142 079 753	Blue				
		R142 079 754	Yellow				
		R142 079 755	Grey				
		R142 079 756	White				
		R142 079 757	Brown				
		R142 079 758	Orange				
		R142 079 759	Violet				
RG59 BELDEN 1505A DRAKA 0.8/3.7 ARGOSY Image 720 CAE HD 08370	0.8/3.7	R142 079 760	Black	3.75	0.85	6.6	25.7
		R142 079 761	Red				
		R142 079 762	Green				
		R142 079 763	Blue				
		R142 079 764	Yellow				
		R142 079 765	Grey				
		R142 079 766	White				
		R142 079 767	Brown				
		R142 079 768	Orange				
		R142 079 769	Violet				
RG6 BELDEN 1694A DRAKA 1.0/4.8 ARGOSY Image 1000 CAE 10460	1.0/4.8	R142 079 770	Black	4.85	1.05	7.1	23.7
		R142 079 771	Red				
		R142 079 772	Green				
		R142 079 773	Blue				
		R142 079 774	Yellow				
		R142 079 775	Grey				
		R142 079 776	White				
		R142 079 777	Brown				
		R142 079 778	Orange				
		R142 079 779	Violet				

Plugs

STRAIGHT PLUGS CRIMP TYPE FOR FLEXIBLE CABLES




Fig. 1





Fig. 2

Cable group	Cable group dia.	Part number	Fig.	Dimensions mm (inch)				Packaging	Note
				A	B	C	D		
RD179 BELDEN 179DT, DRAKA 0.31/1.45 AF, CAE HD 03140	0.3/1.4	R142 077 742	1		1.55	0.4	29.7	100	
Mini RG59 Belden 1855A, Draka 0.6/2.8 AF, CAE HD 0628	0.6/2.8	R142 077 702	2	0.85 (.03)	2.85 (.11)	5.42 (.21)	27.68 (1.09)	100	
Mini RG59 Argosy Image 360	0.6/2.95	R142 077 712			3.00 (.12)				
RG59 Belden 1505A, Draka 0.8/3.7 AF, CAE HD 08370, Argosy Image 720	0.8/3.7	R142 077 722			3.75 (.15)	6.60 (.26)	26.68 (1.05)		
		R142 085 702		0.90	3.95	6.60	28.68		Hexagonal crimp tool 1.73/6.48
RG6 Belden 1694A, Draka 1.0/4.8 AF, CAE HD 10460, Argosy Image 1000	1.0/4.8	R142 077 732		1.05 (.04)	4.85 (.19)	7.50 (.30)	26.68 (1.05)		
RG11 Belden 7731, Draka 1.6/7.3 AF, CAE HD16720, Argosy Image 2000	1.6/7.3	R142 077 747		1.70	7.45	11.05	32		

RIGHT ANGLE PLUG CRIMP TYPE FOR FLEXIBLE CABLE

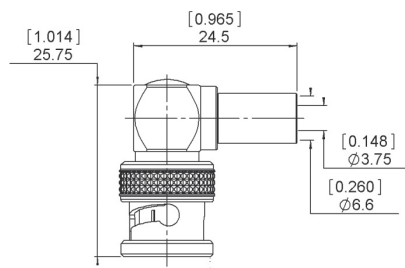


Cable group	Cable group dia.	Part number	Packaging
RG59 Belden 1505A, Draka 0.8/3.7 AF, CAE HD 08370, Argosy Image 720	0.8/3.7	R142 187 720	100

BNC 75 HDTV

Jacks and receptacles

STRAIGHT BULKHEAD JACK CRIMP TYPE FOR FLEXIBLE CABLE

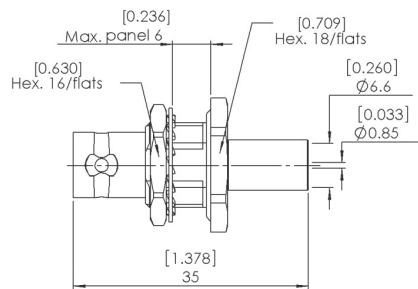

Cable group	Cable group dia.	Part number	Panel drilling	Packaging
R659 Belden 1505A, Draka 0.8/3.7 AF, CAE HD 08370, Argosy Image 720	0.8/3.7	R142 334 700	P16	100

PCB FEMALE RECEPTACLES

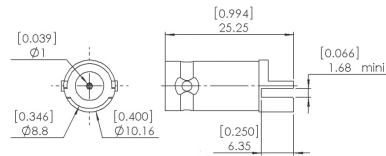



Fig. 1




Fig. 2





Fig. 3

Part number	Fig.	Captive center contact	Panel drilling	Packaging	Note
R142 568 703	1	yes		100	Edge mount PCB
R142 567 703	2				Bulkhead Edge mount PCB
R142 500 740	3		P21	60	Straight PCB, Zamak

RIGHT ANGLE PCB FEMALE RECEPTACLES



Part number	Captive center contact	Note
R142 676 700	yes	Bulkhead

Adapters

IN SERIES ADAPTERS




Fig. 1




Fig. 2

Part number	Fig.	Captive center contact	Panel drilling	Note	Packaging
R142 703 703	1	yes		Male-male	100
R142 720 700	2		P16	Female-female	

BETWEEN SERIES ADAPTERS




Fig. 1




Fig. 2

Part number	Fig.	Captive center contact	Note
R192 417 010	1	yes	BNC HD male - N male
R192 418 010	2		BNC HD female - N female

Straight plugs

STRAIGHT PLUGS CLAMP TYPE




Fig. 1




Fig. 2




Fig. 3

Cable group	Cable group dia.	Part number	Fig.	Dimensions (mm)			Captive center contact	Note
				A	B	C		
RG178/RG196	2/50/S + D	R141 003 000	1	27	2.2	0.6	yes	
RG174/RG316/RD316/RG179	2.6/50+75/S+D	R141 004 000			3.1			
PPD Cable	3.5/50	R141 005 000		28	3.7	1.2		
RG58/RG141	5/50/S	R141 007 000	2				no	
		R141 007 161						
RG58/RG141/RG142/RG223/RG400	5/50/S + D	R141 008 000		28	5.6	1.2		
		R141 009 000		28	5.6	1.2		
		R141 010 000	1			1.05	yes	
		R141 012 000		27.5	6.6	1.05	no	
RG213/RG393/RG214/RG216	10 + 11/50/S + D	R141 018 000	3				yes	
RG402	.141"	R141 052 000	1	29	3.65	1.2	no	Semi-rigid cable

Straight plugs

STRAIGHT PLUGS FULL CRIMP TYPE FOR FLEXIBLE CABLES




Fig. 1




Fig. 2




Fig. 3




Fig. 4




Fig. 5

Cable group	Cable group dia.	Part number	Fig.	Dimensions (mm)			Captive center contact	Note	
				A	B	C			
RG178/RG196	2/50/S	R141 070 520	1	23	1.7	0.4	yes	Reverse crimp	
RG174/RG316	2.6/50/S	R141 075 000	2	30.3	1.8	0.6			
		R141 075 161						Commercial version	
		R141A 075 161	3	26	1.7	0.6		Single piece body ECO version	
	3.8/93/S	R141 077 000	2	28	2.7	0.4			
RG58/RG14	5/50/S	R141 072 000	4	39	3.1				
		R141 082 000	5	28					
		R141 082 161	3						
		R141A 082 161						30	3.1
RG142/RG223/RG400	5/50/D	R141 083 000	5	28	3	1.05			Single piece body

Right angle plugs and straight jacks

RIGHT ANGLE PLUGS CLAMP TYPE FOR FLEXIBLE CABLES




Fig. 1




Fig. 2

Cable group	Cable group dia.	Part number	Fig.	Dimensions (mm)		Captive center contact	Note
				A	B		
RG178/RG196	2/50	R141 153 000	1	2.2	0.6	yes	100 pieces
RG174/RG316/RD316/RG179	2.6/50+75/S+D	R141 154 000		3.1			
RG58/RG141/RG142/RG223/RG400	5/50/S + D	R141 156 000	2	5.6	1.05		Unit packaging

Right angle plugs and straight jacks

RIGHT ANGLE PLUGS FULL CRIMP TYPE FOR FLEXIBLE CABLES





Fig. 1




Fig. 2

Cable group	Cable group dia.	Part number	Fig.	Dimensions (mm)		Captive center contact	Note
				B	C		
RG174/RG316	2.6/50/S	R141 181 161	1	3.25	1.7	yes	Commercial version
RG58/RG141	5/50/S	R141 182 000	2	5.5	1.05		Single piece body
		R141 182 161	1	5.5	3.15		Commercial version
		R141 182 177	2	5.55	3.2		Non magnetic
RG142/RG223/RG400	5/50/D	R141 183 000		5.8	1.05		Single piece body

STRAIGHT JACKS FOR FLEXIBLE CABLES




Fig. 1




Fig. 2



Cable group	Cable group dia.	Part number	Fig.	Dimensions (mm)		Captive center contact	Note
				A	B		
RG58/RG141/RG142/RG223/RG400	5/50/S + D	R141 207 000	1	5.6	1.05	no	Clamp type
		R141 208 000					
RG174/RG316	2.6/50/S	R141 217 000	2	5.5	1.05	yes	Full crimp type
RG58/RG141	5/50/S	R141 237 000					Single piece body, full crimp type
		R141 237 161					Commercial version, full crimp type
RG142/RG223/RG400	5/50/D	R141 220 000					Single piece body, full crimp type

BNC 50Ω

square flange jacks

STRAIGHT SQUARE FLANGE JACKS CLAMP TYPE FOR FLEXIBLE CABLES

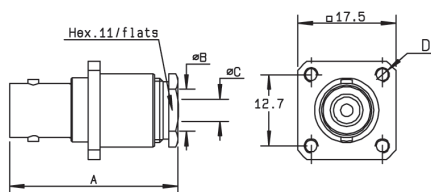



Fig. 1

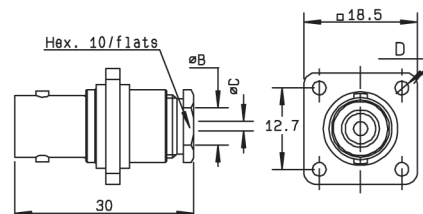


Fig. 2

Cable group	Cable group dia.	Part number	Fig.	Dimensions (mm)				Captive center contact	Panel drilling	Note
				A	B	C	D			
RG178/RG196	2/50/S + D	R141 253 000	1	29.5	2.2	0.6	3-56-UNF-2B	yes	P01	
RG174/RG316/RD316/RG179	2.6/50+75/S+D	R141 254 000			3.1				P02	
		R141 278 000								
		R141 277 000							P01	Insulated flange
RG58/RG141	5/50/S	R141 257 000	1	30	5.6	1.05	2.5	no	P01	
		R141 256 000	2		5.6	1.05	2.6		P02	Insulated flange
RG58/RG141/RG142/RG223/RG400	5/50/S + D	R141 258 000	1	30	5.6	1.05	3-56-UNF-2B		P01	Unit packaging
RG59	6/75	R141 261 000		30	6.5	1	2.5		P10	

STRAIGHT SQUARE FLANGE JACKS FULL CRIMP TYPE FOR FLEXIBLE CABLES

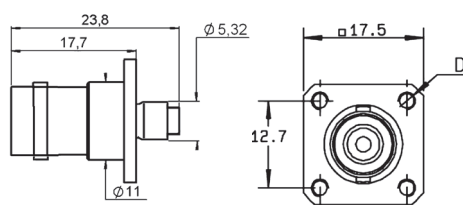


Fig. 1






Fig. 2

Cable group	Cable group dia.	Part number	Fig.	Dimensions D (mm)	Captive center contact	Panel drilling	Note
RG174/RG316	2.6/50	R141 290 200	1	M3 x 0.5	yes	P04	Reverse crimping, Unit packaging
RG58/RG141	5/50/S	R141 292 000	2	3 x 56 UNEF 2B		P17	Single piece body





Bulkhead jacks

STRAIGHT BULKHEAD JACKS CLAMP TYPE

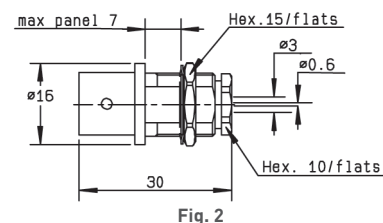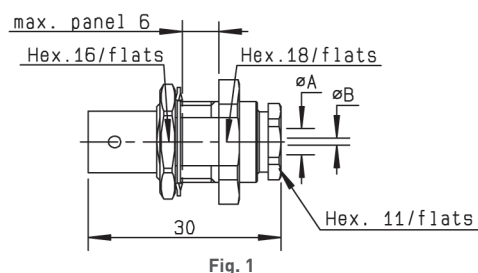

Cable group	Cable group dia.	Part number	Fig.	Dimensions (mm)		Captive center contact	Panel drilling	Note
				A	B			
RG178/RG196	2/50/S	R141 323 000	1	2.2	0.6	yes	P11	Panel sealed
RG174/RG316/RD316/RG179	2.6/50+75/S+D	R141 304 000	2					
		R141 324 000		3.1	0.6			Panel sealed
RG174/RG316/RD316	2.6/50/S + D	R141 324 200	1	3.1	0.6			Totally sealed
RG58/RG141/RG142/RG223/RG400	5/50/S + D	R141 327 000		5.6	1.05	no		Panel sealed
RG401	.141"	R141 338 007		3.68	1.27	yes		Panel sealed, non magnetic
		R141 338 000			3.65	1.05	no	Panel sealed

STRAIGHT BULKHEAD JACKS CRIMP TYPE FOR FLEXIBLE CABLES

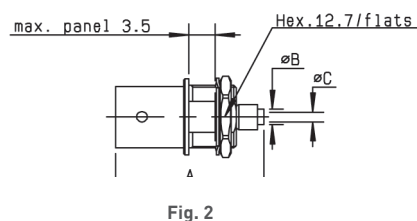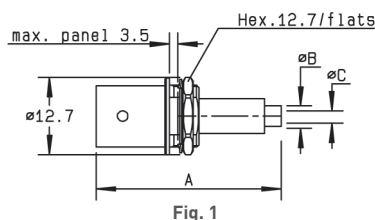

Cable group	Cable group dia.	Part number	Fig.	Dimensions (mm)			Captive center contact	Panel drilling	Note
				A	B	C			
RG178	2/50S	R141 303 503	2	26.4	2	0.4	yes		Reverse crimping/ commercial version
RD178	2/50D	R141 301 000	1	33.35	1.09	0.6		P14	
		R141 306 000		34	1.7				
RG174/RG316	2.6/50/S	R141 306 503	2	26	2.95	0.6	yes	P14	Reverse crimping/ commercial version
		R141 331 500	3	38.5	1.7			P11 or P16	Panel sealed
		R141A 306 000	1	31	1.7	0.6	no	P14	ECO version
RG58/RG141	5/50/S	R141 308 000	4				yes	P14	Single piece body
		R141 332 500	3	35.5	3.1	1.05		P11 or P16	Panel sealed single piece body

Flange receptacles

FLANGE RECEPTACLES

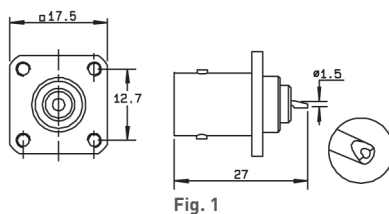


Fig. 1

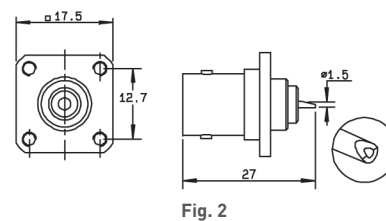


Fig. 2

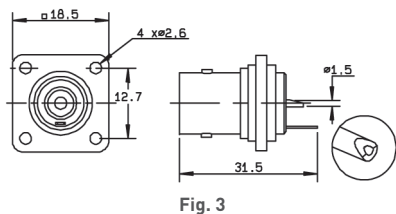


Fig. 3

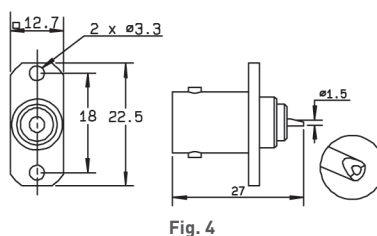


Fig. 4





Fig. 5

Part number	Fig.	Dimensions (mm)			Captive center contact	Panel drilling	Flange holes	Note
		A	B	C				
R141 403 000	1				yes	P07	4 x M2.5	
R141 404 000	2					P06	4 x M2.5	
R141 406 000	1					P07	4 x M2.6	
R141 407 000	2					P06		
R141 410 000	3					P02		Insulated flange/solder tag
R141 453 000	4					P18		2 hole flange
R141 654 000	5	26.9	12.7	17.5		P05	4 x M2.6	Right angle receptacle

Bulkhead receptacles








RIGHT ANGLE BULKHEAD RECEPTACLE WITH SOLDER POT

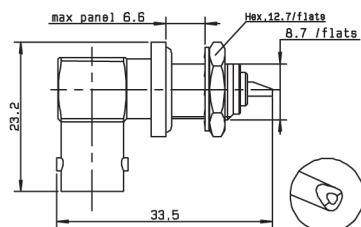

Part number	Captive center contact	Panel drilling
R141 680 000	yes	P14

Bulkhead receptacles

STRAIGHT BULKHEAD RECEPTACLES WITH SOLDER POT

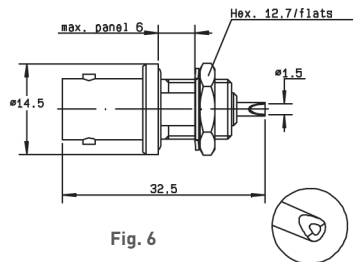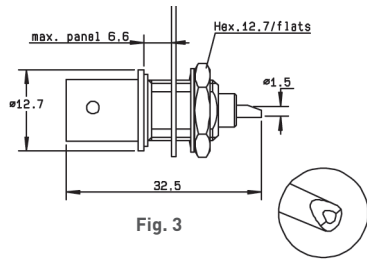

Part number	Fig.	A (Length)	Captive center contact	Panel drilling	Note
R141 554 000	1		yes	P12	
R141 557 000	2			P14	
R141 559 000	3				Solder tag
R141 563 161	2				Silver plated center contact/ commercial version
R141 572 000	4			P11	Insulated receptacle + solder tag
R141 574 000	5			P14	
R141 574 161		Commercial version/insulated			
R141 603 000	6			P15	Fully sealed/Q200-5 insulator
R141 605 000		Fully sealed			
R141A 605 000	3	28		P29	Not sealed/ECO version
R141 625 000	7			P14	Hermetically sealed

BNC 50Ω

Receptacles

RECEPTACLES




Fig. 1





Fig. 2



Part number	Fig.	Captive center contact	Panel drilling	Note
R141 440 000	1	yes	P03	Male square flange
R141 580 000	2		P14	Male bulkhead / Panel sealed / Solder tag

STRAIGHT PCB FEMALE RECEPTACLES




Fig. 1




Fig. 2

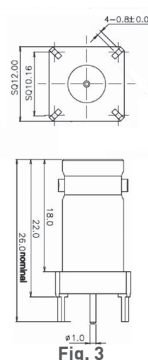


Fig. 3

Part number	Fig.	Captive center contact	Panel drilling	Note
R141 426 000	1	yes	P08	Die cast body / commercial version
R141 426 161	2			
R141 426 168	3			

RIGHT ANGLE PCB FEMALE RECEPTACLES




Fig. 1




Fig. 2











Fig. 3

Part number	Fig.	Captive center contact	Panel drilling	Finish	Note
R141 665 000	1	yes	P19	Nickel	Rear mount / ECO version
R141 665 200	2		P08		
R141A 676 121	3		P20 and P30		

Adapters

IN SERIES ADAPTERS



Part number	Fig.	Captive center contact	Dimension A (mm)	Flange holes	Panel drilling	Note
R141 703 000	1	yes				Male - male
R141 704 000	2					Female - female
R141 710 000	3			4 x M2.5	P10	Female - female square flange
R141 717 000	4			4 x 2.6	P02	Female - female square insulated flange
R141 720 000	5				P13	Female - female bulkhead
R141A 720 000						Female - female bulkhead/ECO version
R141 723 000					P13 or P16	Female - female insulated bulkhead
R141 723 161						Female - female insulated bulkhead/commercial version
R141 730 000	6		35.7		P13	Female - female panel sealed bulkhead
R141 753 000			35.3			Female - female hermetically sealed bulkhead
R141 770 000	7					Male - female right angle

BNC 50Ω

Adapters and caps

CROSS AND TEE IN SERIES ADAPTERS




Fig. 1




Fig. 2




Fig. 3




Fig. 4

Part number	Fig.	Captive center contact	Note
R141 780 000	1	yes	Male/female-female tee
R141 782 000	2		Female/female-female tee
R141 789 000	3		Female/female-male tee
R141 799 000	4		Male/female-female-female cross/unit packaging

MALE AND FEMALE CAPS




Fig. 1




Fig. 2




Fig. 3




Fig. 4



Part number	Fig.	Note
R141 802 000	1	Male
R141 805 000	2	Male with cord
R141 812 000	3	Male with chain
R141 842 000	4	Female with chain
R141 862 000	3	Male short circuit/with chain

Straight plugs

STRAIGHT PLUGS CLAMP TYPE FOR FLEXIBLE CABLES





Fig. 1




Fig. 2




Fig. 3




Fig. 4

Cable group	Cable group dia.	Part number	Fig.	Dimensions (mm)			Captive center contact	Note
				A	B	C		
RG179	2.6/75/S	R142 004 000	1				yes	
RG59/RG62	6/75/S	R142 016 000	2	28	6.6	0.75		Unit packaging
		R142 016 161	3					Commercial version
RG6A/U	8/75/S + D	R142 017 000	2	45.5	9.1	1.5	yes	Unit packaging
RG216/RG11/RG12/RG144	10 + 11/75/S + D	R142 018 000	4					

STRAIGHT PLUGS FULL CRIMP TYPE FOR FLEXIBLE CABLES




Fig. 1




Fig. 2




Fig. 3

Cable group	Cable group dia.	Part number	Fig.	Dimensions (mm)			Captive center contact	Note
				A	B	C		
RG179	2.6/75/S	R142 076 000	1				yes	
		R142 076 161		31	1.8	0.4		Commercial version
		R142A 076 161	3	25.3	1.65	0.4		Single piece body/ECO version
BT3002	3.6/75/D	R142 081 120		29	2.1	0.34	yes	Single piece body
		R142 081 130	2	29	2.1	0.34		Single piece body/unit packaging
		R142A 081 130		29	2.1	0.34		Single piece body/ECO version
ST212		R142 091 161	3	30	2.1	0.6	yes	
BT2002	5/75/D	R142 083 000	2	27.3	5.5			Single piece body
RG59/RG62	6/75/S	R142 085 000		28	6.6	0.75		Single piece body
		R142 085 161		28	3.9		no	Single piece body/Commercial version
		R142A 085 161	3	29	4	0.8		Single piece body/ECO version
	7/75/S	R142 086 161		30.8	5.15	1.35	yes	Single piece body/Commercial version
RG11/RG12/RG144	7.5/75/D	R142 090 000	2	28	5.25	0.85		Single piece body
	10/75/S	R142 095 000		28	11.05	1.35		Single piece body

Right angle plugs and jacks

RIGHT ANGLE PLUGS CLAMP TYPE FOR FLEXIBLE CABLES

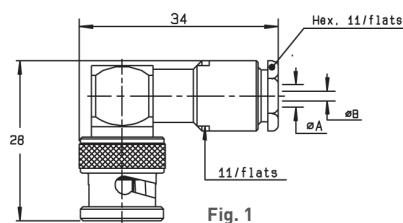


Fig. 1

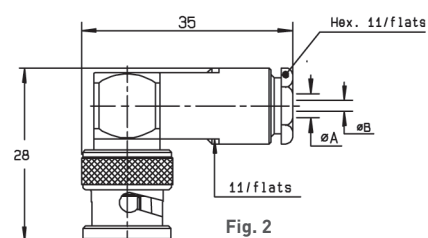


Fig. 2

Cable group	Cable group dia.	Part number	Fig.	Dimensions (mm)		Captive center contact
				A	B	
RG179	2.6/75/S	R142 154 000	1	3.1	0.6	yes
RG59/RG62	6/75/S	R142 157 000	2	6.6	0.75	

RIGHT ANGLE PLUGS FULL CRIMP TYPE FOR FLEXIBLE CABLES

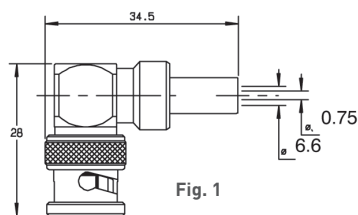


Fig. 1





Fig. 2

Cable group	Cable group dia.	Part number	Fig.	Captive center contact	Note
RG59/RG62	6/75/S	R142 184 000	1	yes	
		R142 184 161	2		Commercial version

STRAIGHT JACKS FULL CRIMP TYPE FOR FLEXIBLE CABLES



Cable group	Cable group dia.	Part number	Dimensions (mm)			Captive center contact	Note
			A	B	C		
RG179	2.6/75/S	R142 217 000	1.75	0.4	32.5	yes	
RG59/RG62	6/75/S	R142 242 000	6.6	0.75	29.5		Single piece body
		R142 242 161			29		Single piece body/commercial version

Jacks and blukhead jacks

STRAIGHT SQUARE FLANGE JACKS CLAMP TYPE FOR FLEXIBLE CABLES

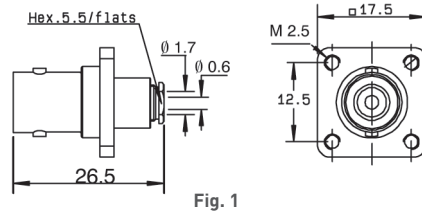



Fig. 1


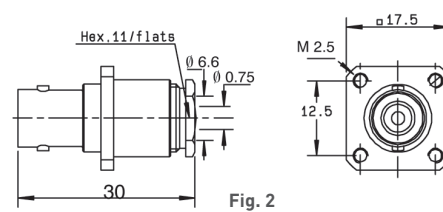


Fig. 2

Cable group	Cable group dia.	Part number	Fig.	Captive center contact	Panel drilling	Note
RG179	2.6/75/S	R142 202 000	1	yes	P01	Unit packaging
RG59/RG62	6/75/S	R142 268 000	2			

STRAIGHT BULKHEAD JACK CLAMP TYPE FOR FLEXIBLE CABLES

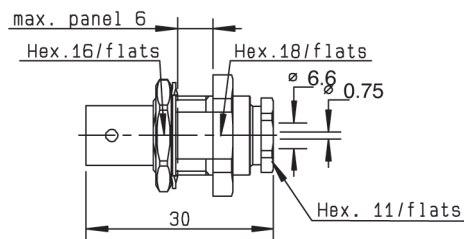

Cable group	Cable group dia.	Part number	Captive center contact	Panel drilling	Note
RG59/RG62	6/75/S	R142 329 000	yes	P11	Panel sealed

STRAIGHT BULKHEAD JACKS CRIMP TYPE FOR FLEXIBLE CABLES

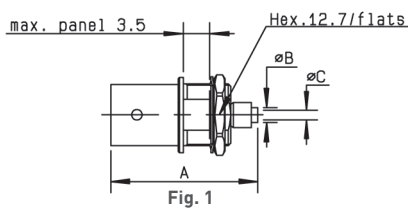


Fig. 1




Fig. 2

Cable group	Cable group dia.	Part number	Fig.	Dimensions (mm)			Captive center contact	Panel drilling	Note
				A	B	C			
RG179	2.6/75/S	R142 306 500	1	26	2.95	0.4	yes	P14	Reverse crimping/Commercial version
		R142A 306 500					no		Reverse crimping/ECO version
		R142 306 503					yes		Reverse crimping
		R142 331 011	2	38	1.75	0.4		P11 or P16	Panel sealed/Silver plated
BT3002	3.6/75/D	R142A 325 106	2	36	2.1	0.5	no	P11 or P16	Panel sealed/ECO version
RG59/RG62	6/75/S	R142 334 161	2	35	6.6	0.75	yes	P11 or P16	Panel sealed/Commercial version
		R142A 334 161	2	35	3.8	0.7		P11 or P16	Panel sealed/ECO version

BNC 75Ω

Receptacles

RECEPTACLES WITH SOLDER POT

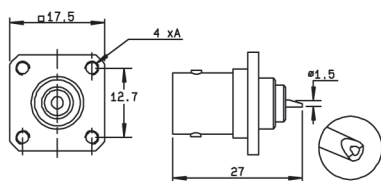


Fig. 1





Fig. 2



Part number	Fig.	Captive center contact	Panel drilling	Flange holes A	Note
R142 412 000	1	yes	P06	4 x M2.5	Square flange + unit packaging
R142 562 000	2		P14		Bulkhead female receptacle Unit packaging

STRAIGHT PCB FEMALE RECEPTACLES

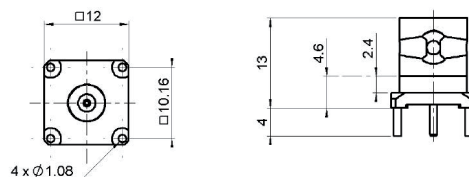

Part number	Captive center contact	Panel drilling	Note
R142 426 000	yes	P08	

RIGHT ANGLE PCB FEMALE RECEPTACLE




Fig. 1









Fig. 2

Part number	Fig.	Captive center contact	Panel drilling	Note
R142 684 130	1	yes	P09 and P16	Press-fit pins
R142 676 430	2		yes	Harpoon legs




Adapters

IN SERIES ADAPTERS



Part number	Fig.	Captive center contact	Panel drilling	Note
R142 703 000	1	yes		Male - male
R142 704 000	2			Female - female
R142 710 000	3		P01	Female - female square flange
R142 720 000	4		P11	Female - female bulkhead
R142A 720 000	4		P11	Female - female bulkhead - Eco version
R142 723 000	4		P11 or P16	Female - female insulated bulkhead
R142 770 000	5			Male - female right angle

TEE IN SERIES ADAPTERS

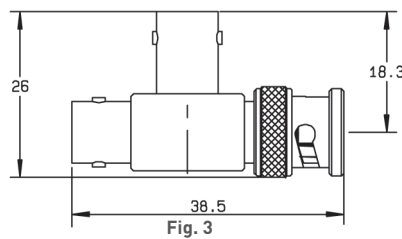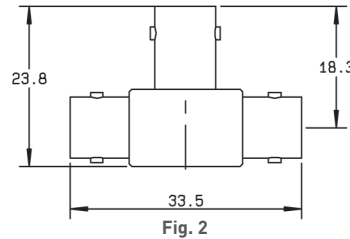

Part number	Fig.	Captive center contact	Note
R142 780 000	1	yes	Male/female-female tee
R142 782 000	2		Female/female-female tee
R142 789 000	3		Female/female-male tee


BNC 75Ω

Characteristics

Test/characteristics	Values/remarks	
Frequency range	DC - 10 GHz	
Impedance	50Ω	
Working voltage	500 Vrms	
Dielectric withstanding voltage Between center conductor and inner screen Between inner screen and outer screen	Unmated connector 1500 Vrms 1000 Vrms	Mated connector 3000 Vrms 1000 Vrms
Temperature range	-55°C / +125°C	


Plug, jack and receptacle

STRAIGHT PLUG CLAMP TYPE

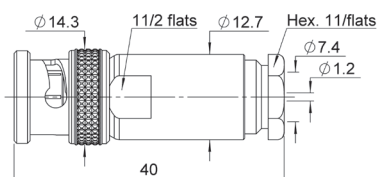


Cable group dia.	Part number
7.3/50/D	R266 010 000

STRAIGHT JACK CLAMP TYPE

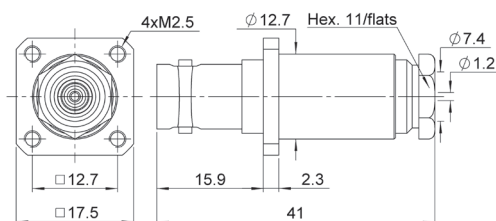

Cable group dia.	Part number	Panel Drilling
7.3/50/D	R266 260 000	P10


RECEPTACLE

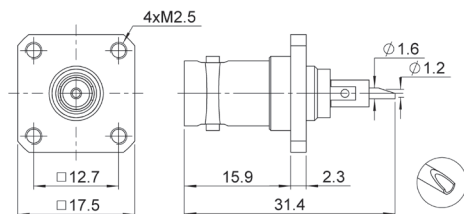


Part number	Panel Drilling
R266 403 000	P10

Panel drilling


P01




P02




P03




P04




P05




P06




P07




P08




P09




P10



P11




P12




BNC

Panel drilling


P13




P14




P15




P16




P17




P18




P19




P20




P21



P22



P23



P24

